





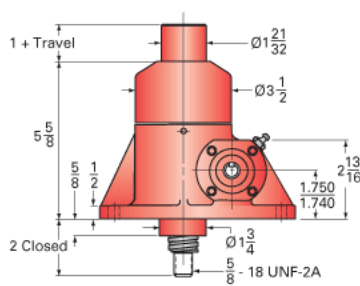

Call 800-321-7800 or visit us online at www.nookindustries.com to configure and order your ActionJac 2R-BSJ-I 6:1 today!

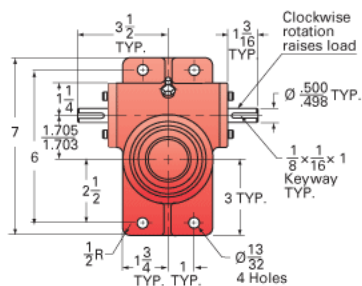

Capacity [Ton]	2
Gear Ratio	6:1
Lifting Screw Diameter [in]	1.00
Screw Lead [in]	0.250
Root Diameter [in]	0.820
Turns of Worm per Inch Travel	24
Torque to Raise 1 lb. Keyed [in-lb]	0.0110
Torque to Raise 1 lb. [in-lb]	0.0100
BackDrive Holding Torque [ft-lb]	3.0

Maximum Allowable Input [hp]	2.00
Maximum Input Torque [in-lb]	40
Maximum Worm Speed at Rated Load [rpm]	1800
Maximum Load at 1750 RPM [lb]	4000
Tare Drag Torque [in-lb]	4
Starting Torque	1.5 x Running Torque

Base 0 Travel [lb]	18
Per Inch of Travel [lb]	0.60
Grease [lb]	0.5