




Call 800-321-7800 or visit us online at [www.nookindustries.com](http://www.nookindustries.com) to configure and order your ActionJac 20-BSJ-I 8:1 today!

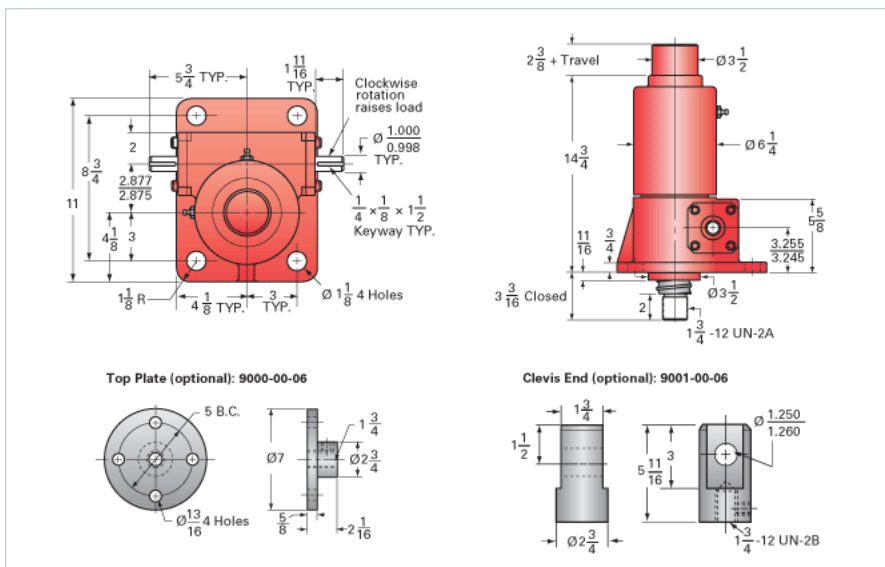

|                                  |        |
|----------------------------------|--------|
| Capacity [Ton]                   | 20     |
| Gear Ratio                       | 8:1    |
| Turns of Worm per Inch Travel    | 16     |
| Torque to Raise 1 lb. [in-lb]    | 0.0157 |
| Lifting Screw Diameter [in]      | 2.25   |
| Screw Lead [in]                  | 0.500  |
| Root Diameter [in]               | 1.850  |
| BackDrive Holding Torque [ft-lb] | 27.0   |
| Tare Drag Torque [in-lb]         | 40     |

|  |                      |
|--|----------------------|
| Maximum Allowable Input [hp]           | 7.50                 |
| Maximum Input Torque [in-lb]           | 626                  |
| Maximum Worm Speed at Rated Load [rpm] | 755                  |
| Maximum Load at 1750 RPM [lb]          | 17204                |
| Starting Torque                        | 1.5 x Running Torque |

|                         |      |
|-------------------------|------|
| Base 0 Travel [lb]      | 85   |
| Per Inch of Travel [lb] | 1.50 |
| Grease [lb]             | 2.2  |