


ActionJac 10-MSJ-DC 8:1

Call 800-321-7800 or visit us online at www.nookindustries.com to configure and order your ActionJac 10-MSJ-DC 8:1 today!





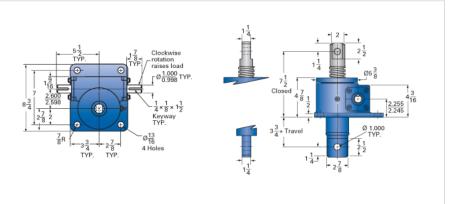

Capacity [Ton] Gear Ratio Turns of Worm per Inch Travel Torque to Raise 1 lb. [in-lb]	10 8:1 16 0.0377 0.0434
Turns of Worm per Inch Travel	16 0.0377
	0.0377
Torque to Raise 1 lb [in-lb]	
rorque to rease i ib. [iii-ib]	0.0434
Torque to Raise 1 lb. Keyed [in-lb]	0.0 10 1
Lifting Screw Diameter [in]	2.00
Screw Lead [in]	0.500
Root Diameter [in]	1.410
Tare Drag Torque [in-lb]	20
Performance Specifications	
Maximum Allowable Input [hp]	5.00
Maximum Input Torque [in-lb]	753
Maximum Worm Speed at Rated Load Non-keyed [rpm]	418
Maximum Worm Speed at Rated Load Keyed [rpm]	363
Maximum Load at 1750 RPM Non-keyed [lb]	4776
Maximum Load at 1750 RPM Keyed [lb]	4149
Starting Torque	2 x Running Torque
Weight	
Base 0 Travel [lb]	45
Per Inch of Travel [lb]	1.20
Grease [lb]	1.5