
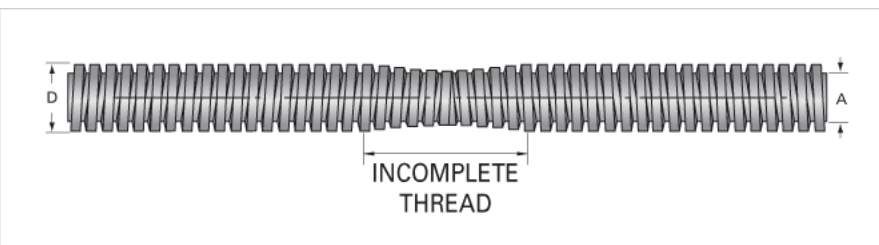


## PowerAC 3/4"-5 TA

Call 800-321-7800 or visit us online at [www.nookindustries.com](http://www.nookindustries.com) to configure and order your PowerAC 3/4"-5 TA today!

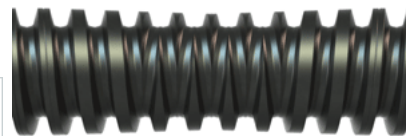

### Product Info

Screw Code	075 TA
Screw Direction	RH/LH
Screw Material	4140 Series

### Details

Lead [in]	0.200
Starts	1
Pitch [in]	0.200
Turns Per Inch	5
Threads per Inch	5
Thread Code	075
Form	2C
End Code for Types 1,2,3,5 [* Journals may show tracings of the thread]	12
End Code for Type 4 [* Journals may show tracings of the thread]	8

### Dimensions

A - Root Diameter Minimum [in]	0.502
D - Nominal Rod Diameter [in]	0.750
Incomplete Overlapping Thread Length [in]	2.00
Maximum Overall Length [in]	72
Maximum Useable LH & RH Thread [in]	35.00

### Weight

Weight Per Foot [lb]	1.23
----------------------	------

### Part Numbers

36" Part Number	TL3/4-5RS 36
72" Part Number	TL3/4-5RS 72
144" Part Number	

### Performance Specifications

Lead Accuracy +/- [in/in]	0.0003
---------------------------	--------