


## PowerAC 1"-5 TA

Call 800-321-7800 or visit us online at [www.nookindustries.com](http://www.nookindustries.com) to configure and order your PowerAC 1"-5 TA today!

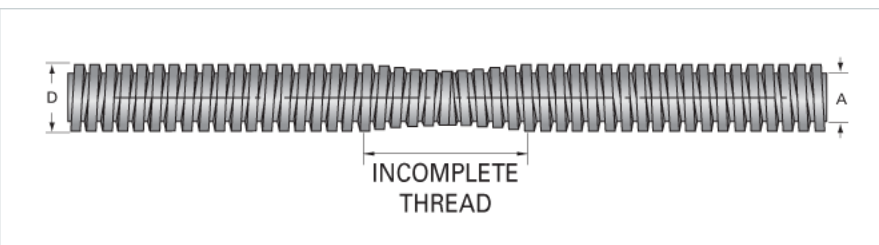

| Product Info  |             |
|---|-------------|
| Screw Code  | 105 TA      |
| Screw Direction   | RH/LH       |
| Screw Material  | 4140 Series |
| Details   |             |
| Lead [in]   | 0.200       |
| Starts  | 1           |
| Pitch [in]  | 0.200       |
| Turns Per Inch  | 5           |
| Threads per Inch  | 5           |
| Thread Code   | 105         |
| Form  | 2C          |
| End Code for Types 1,2,3,5 [* Journals may show tracings of the thread] | 17          |
| End Code for Type 4 [* Journals may show tracings of the thread]        | 10          |
| Dimensions  |             |
| A - Root Diameter Minimum [in]  | 0.750       |
| D - Nominal Rod Diameter [in]   | 1.000       |
| Incomplete Overlapping Thread Length [in]                               | 2.50        |
| Maximum Overall Length [in]   | 72          |
| Maximum Useable LH & RH Thread [in]                                     | 34.75       |
| Weight  |             |
| Weight Per Foot [lb]  | 2.16        |
| Part Numbers  |             |
| 36" Part Number   | TL1-5RS 36  |
| 72" Part Number   | TL1-5RS 72  |
| 144" Part Number  |             |
| Performance Specifications  |             |
| Lead Accuracy +/- [in/in]   | 0.0003      |