


## PowerAC 1 1/4"-5 TA

Call 800-321-7800 or visit us online at [www.nookindustries.com](http://www.nookindustries.com) to configure and order your PowerAC 1 1/4"-5 TA today!

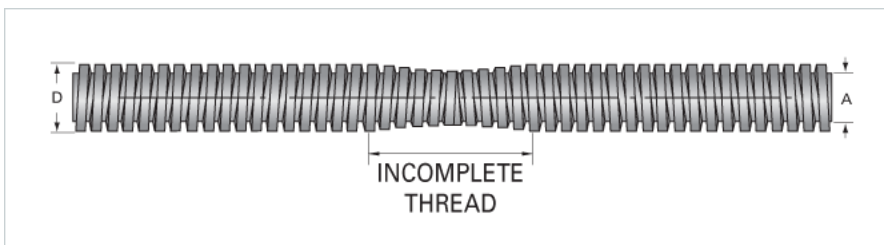

### Product Info

|                 |             |
|-----------------|-------------|
| Screw Code      | 125 TA      |
| Screw Direction | RH/LH       |
| Screw Material  | 4140 Series |

### Details

|   |       |
|---|-------|
| Lead [in]   | 0.200 |
| Starts  | 1     |
| Pitch [in]  | 0.200 |
| Turns Per Inch  | 5     |
| Threads per Inch  | 5     |
| Thread Code   | 125   |
| Form  | 2C    |
| End Code for Types 1,2,3,5 [* Journals may show tracings of the thread] | 25    |
| End Code for Type 4 [* Journals may show tracings of the thread]        | 16    |

### Dimensions

|   |       |
|---|-------|
| A - Root Diameter Minimum [in]            | 0.999 |
| D - Nominal Rod Diameter [in]             | 1.250 |
| Incomplete Overlapping Thread Length [in] | 2.50  |
| Maximum Overall Length [in]               | 144   |
| Maximum Useable LH & RH Thread [in]       | 70.75 |

### Weight

|                      |      |
|----------------------|------|
| Weight Per Foot [lb] | 3.49 |
|----------------------|------|

### Part Numbers

|                  |                 |
|------------------|-----------------|
| 36" Part Number  |                 |
| 72" Part Number  |                 |
| 144" Part Number | TL1-1/4-5RS 144 |

### Performance Specifications

|                           |        |
|---------------------------|--------|
| Lead Accuracy +/- [in/in] | 0.0003 |
|---------------------------|--------|