



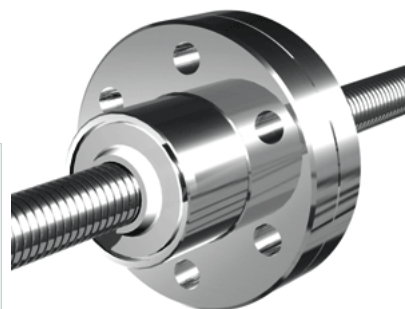

Call 800-321-7800 or visit us online at www.nookindustries.com to configure and order your NRS BF 2W 44x24 w/Wiper today!

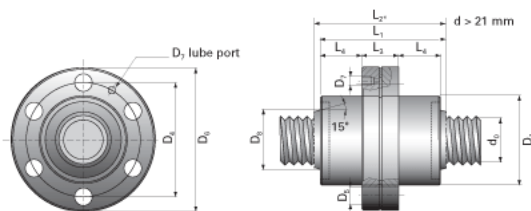

Nominal Rod Diameter [mm]	44
---------------------------	----

Lead [mm]	24
-----------	----

Lead [mm]	24
-----------	----

End Code for Types 1,2,3,5 [* Journals may show tracings of the thread]	40
---	----

D1 [mm]	80
---------	----

D1 [mm]	80
---------	----

D1 [mm]	39
D4 [mm]	102

D4 [mm]	10
D6 [mm]	12

D6 [mm]	124
D7	M8x1

D8 [mm]	56
---------	----

D ₀ [mm]	50
l ₁ [mm]	90

L1 [mm]	90
L2 [mm]	100

L2 [mm]	10
L3 [mm]	33

L3 [mm]	33
L4 [mm]	28

L4 (mm)	20
n x D5	6x

11 x D5	6x
Performance Specifications	

Backlash [mm]	0.07
---------------	------

Backlash [mm]	0.0
---------------	-----

Dynamic Load Ratings Ca [kN]	136.50
------------------------------	--------

Dynamic Load Ratings Coa [kN]	153.60
Static Load Ratings Coa [kN]	221.40