




Call 800-321-7800 or visit us online at www.nookindustries.com to configure and order your NRS SF 2W 20x2 w/Wiper today!

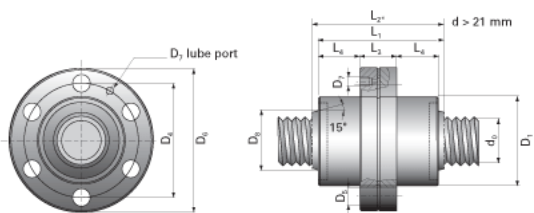

Nominal Rod Diameter [mm]	20
---------------------------	----

Lead [mm]	2
-----------	---

Lead [mm]	2
-----------	---

End Code for Types 1,2,3,5 [* Journals may show tracings of the thread]	15
---	----

D1 [mm]	42
---------	----

D1 [mm]	42
---------	----

D4 [mm]	53
---------	----

D4 [mm]	33
D6 [mm]	64

D6 [mm]	34
D7	M6

D7	mm
D8 [mm]	-

D ₀ [mm]	—
l ₁ [mm]	65

L1 [mm]	69
L2 [mm]	-

L2 [mm]	-
l 3 [mm]	20

L3 [mm]	20
L4 [mm]	22

L4 (mm)	22
n x D5	6x6

Performance Specifications

Dynamic Load Ratings Ca [kN]	19
------------------------------	----

Dynamic Load Ratings Ca [kN]	19
------------------------------	----

Static Load Ratings Coa [kN]	33
------------------------------	----