



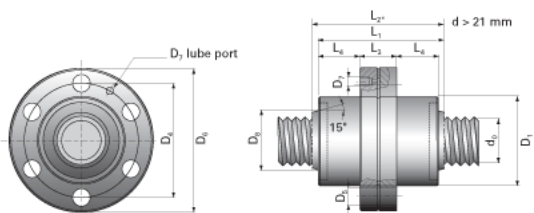

Call 800-321-7800 or visit us online at [www.nookindustries.com](http://www.nookindustries.com) to configure and order your NRS SF 2W 30x2 w/Wiper today!

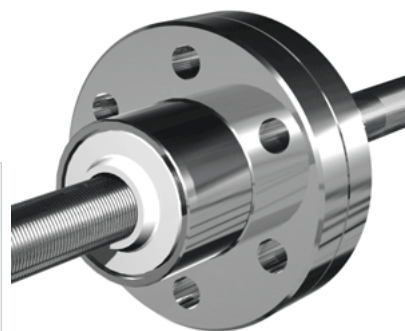

|                           |    |
|---------------------------|----|
| Nominal Rod Diameter [mm] | 30 |
|---------------------------|----|

|           |   |
|-----------|---|
| Lead [mm] | 2 |
|-----------|---|

Lead [mm]

|                                                                         |    |
|-------------------------------------------------------------------------|----|
| End Code for Types 1,2,3,5 [* Journals may show tracings of the thread] | 25 |
|-------------------------------------------------------------------------|----|

|         |    |
|---------|----|
| D1 [mm] | 64 |
|---------|----|

D1 [mm]

D4 [mm]

D6 [mm]

D7

D8 [mm]

L1 [mm]

L2 [mm]

L3 [mm]

L4 [mm]

$$n \times D5$$

## performa

|                              |       |
|------------------------------|-------|
| Dynamic Load Ratings Ca [kN] | 35.20 |
|------------------------------|-------|

|                              |       |
|------------------------------|-------|
| Dynamic Load Ratings Ca [kN] | 35.20 |
|------------------------------|-------|

|                              |       |
|------------------------------|-------|
| Static Load Ratings Coa [kN] | 66.50 |
|------------------------------|-------|