


## PowerAC Trapezoidal Assembly 904 RA w/Plastic Nut

Call 800-321-7800 or visit us online at [www.nookindustries.com](http://www.nookindustries.com) to configure and order your PowerAC Trapezoidal Assembly 904 RA w/Plastic Nut today!

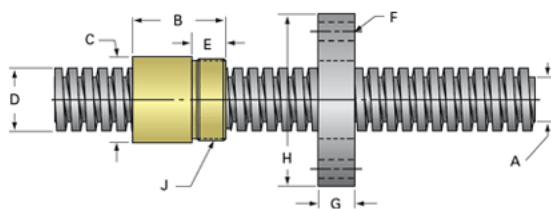

### Trapezoidal Lead Screw

#### (Screw)Product Info

Screw Code	904 RA
Screw Material	4140 Series
Thread Direction	RH

#### (Screw)Details

Diameter	26
Lead	6
Starts	1
Pitch [mm]	6
Lead Accuracy +/- [ $\frac{956}{m/25mm}$ ]	6.25
Thread Code	904
End Code for Types 1,2,3,5 [* Journals may show tracings of the thread]	17
End Code for Type 4 [* Journals may show tracings of the thread]	10

#### (Screw)Dimensions

A - Root Diameter Minimum [mm]	17.84
D - Nominal Rod Diameter	26

#### (Screw)Part Numbers

1800 mm Part Number	15904
3600 mm Part Number	16904
900 mm Part Number	14904

#### (Screw)Weight

Weight Per Meter [kg]	3.2
-----------------------	-----

### Trapezoidal Lead Nut

#### (Nut)Product Info

Part Number	30904
Thread Direction	RH
Type	Plastic

#### (Nut)Details

Diameter	26
Lead [mm]	6
Starts	1
Pitch [mm]	6
Lash (Maximum Axial in) [mm]	0.30
Nominal Rod Diameter	26
Thread Code	904

#### (Nut)Dimensions

B [mm]	45.0
C [mm]	45.0
E [mm]	15.00
F (n) Dia. [mm]	(4) 7.00
F BCD [mm]	70.00
G [mm]	16.0
H [mm]	85.0
J [mm]	M40x15

#### (Nut)Forces and Torques

Torque to Raise 1 kN [Nm]	2.164
---------------------------	-------

#### (Nut)Flange Part Numbers

Flange Part Number	72004
--------------------	-------

#### (Nut)Weight

Flange Weight [kg]	0.54
Nut Weight [g]	79

#### (Nut)Performance Specifications

Efficiency [%]	44
Lead Accuracy +/- [ $\frac{956}{m/25mm}$ ]	6.25
Dynamic Load Capacity [N]	11652
Static Load Capacity [N]	11652