


NH45LEA Assembly

Call 800-321-7800 or visit us online at www.nookindustries.com to configure and order your NH45LEA Assembly today!





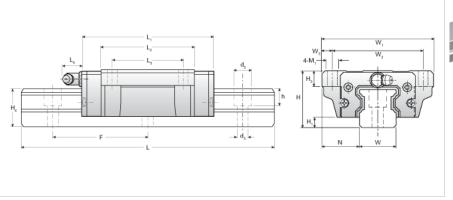

| Dimensions | |
|--------------------------------------------------------------------|-----------|
| H [mm] | 60 |
| H1 [mm] | 11 |
| N [mm] | 37.5 |
| Metric Profile Rail | |
| (Rail)Details | |
| Size [mm] | 45 |
| Type | Standard |
| (Rail)Dimensions | |
| d2 [mm] | 20 |
| d3 [mm] | 14 |
| h [mm] | 21 |
| H4 [mm] | 42 |
| F [mm] | 105 |
| W [mm] | 45 |
| Maximum Length [mm] | 3000 |
| | 3000 |
| (Rail)Weight | 40.0 |
| Weights-Rail [kg/m] | 12.9 |
| Metric Runner Block, Ultra Heavy Load, Flange Type, 4 Tapped Holes | |
| (Runner Block)Details | |
| Size [mm] | 45 |
| (Runner Block)Dimensions | |
| L1 [mm] | 167 |
| L2 [mm] | 130 |
| L3 [mm] | 80 |
| L4 [mm] | 14 |
| M1 | M12 |
| H3 [mm] | 15 |
| W1 [mm] | 120 |
| W2 [mm] | 100 |
| W3 [mm] | 10 |
| (Runner Block)Forces and Torques | |
| Basic Load Ratings C [kN] | 80.61 |
| Basic Load Ratings C [lbf] | 18116 |
| Basic Load Ratings C0 [kN] | 127.48 |
| Basic Load Ratings C0 [lbf] | 28651 |
| Static Moment Ratings-Ma [kN-m] | 2.11 |
| Static Moment Ratings-Ma [lb-in] | 18662 |
| Static Moment Ratings-Mb [kN-m] | 2.11 |
| Static Moment Ratings-Mb [lb-in] | 18662 |
| Static Moment Ratings-Mc [kN-m] | 3.13 |
| Static Moment Ratings-Mc [Ib-in] | 27689 |
| (Runner Block)Weight | 21 000 |
| Weight-Block [kg] | 4.00 |
| (Runner Block)Grease Fitting | т.vv |
| Grease Fitting Part Number | B-PT 1/8 |
| Orease I Itting Fait Number | D-F I 1/0 |