
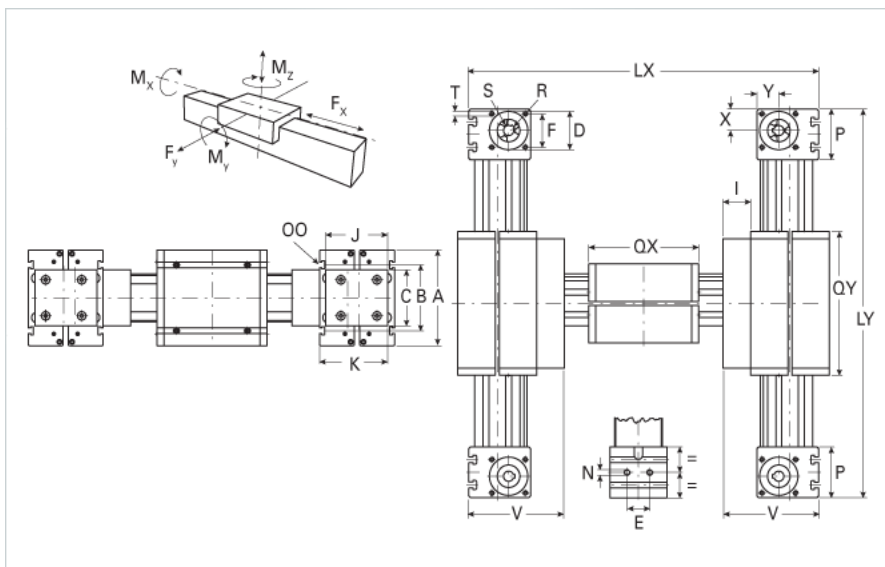


ELZU 40 X&Y-Axis WAC

Call 800-321-7800 or visit us online at www.nookindustries.com to configure and order your ELZU 40 X&Y-Axis WAC today!

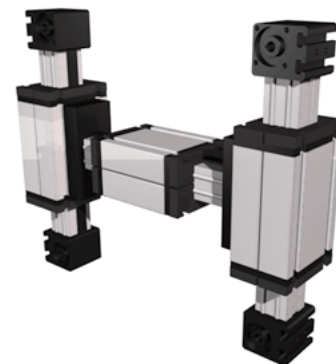

Details

| | |
|-----------------|------|
| Size | 40 |
| Belt | 5M12 |
| mm/Rev | 100 |
| Number of Teeth | 20 |

Dimensions

| | |
|--------------------------------|--------|
| Basic length Lx [mm] | 320 |
| Basic length Ly [mm] | 266 |
| A [mm] | 100 |
| B [mm] | 66 |
| C [mm] | 58 |
| D [mm] | 37 |
| E [mm] | 18 |
| F [mm] | 32 |
| G [mm] | - |
| H [mm] | - |
| I [mm] | 26 |
| J [mm] | 58 |
| K [mm] | 64 |
| MM | - |
| N | M6 |
| OO | M6 |
| P [mm] | 49 |
| Qx [mm] | 138 |
| Qy [mm] | 163 |
| T | M5 |
| V [mm] | 90 |
| X [mm] | 20.5 |
| Y [mm] | 20.5 |
| Shaft Diameter and Length [mm] | 10X 27 |
| Key | 3x3x25 |

Speed

| | |
|---------------------|---|
| Speed Maximum [m/s] | 4 |
|---------------------|---|

Forces and Torques

| | |
|-----------------------------|------|
| No-load torque [Nm] | 0.6 |
| Tensile force 0.2 sec [N] | 480 |
| Tensile force permanent [N] | 390 |
| Fx dynamic [N] | 350 |
| Fy dynamic [N] | 700 |
| Fz dynamic [N] | 650 |
| Mx dynamic [Nm] | 20 |
| My dynamic [Nm] | 18 |
| Mz dynamic [Nm] | 25 |
| Fx static [N] | 390 |
| Fy static [N] | 1200 |
| Fz static [N] | 900 |
| Mx static [Nm] | 25 |
| My static [Nm] | 32 |

| | |
|---|--------|
| Mz static [Nm] | 35 |
| Geometrical moments of inertia of aluminum profile | |
| Elastic modulus [N/mm ²] | 70000 |
| Ix [mm ⁴] | 132000 |
| Iy [mm ⁴] | 134000 |
| Weight | |
| Additional Weight per 100 mm [kg] | 0.24 |
| Basic Weight [kg] | 6.8 |
| Values for Calculating Inertias | |
| Pulley Material | Steel |
| Pulley Diameter [mm] | 31.83 |
| Effective Pulley Width [mm] | 58.0 |
| Belt Weight [kg/m] | 0.074 |
| Standard Carriage Weight [kg] | 1.04 |
| No-load torque [Nm] | 0.3 |
| Friction Coefficient | 0.01 |