
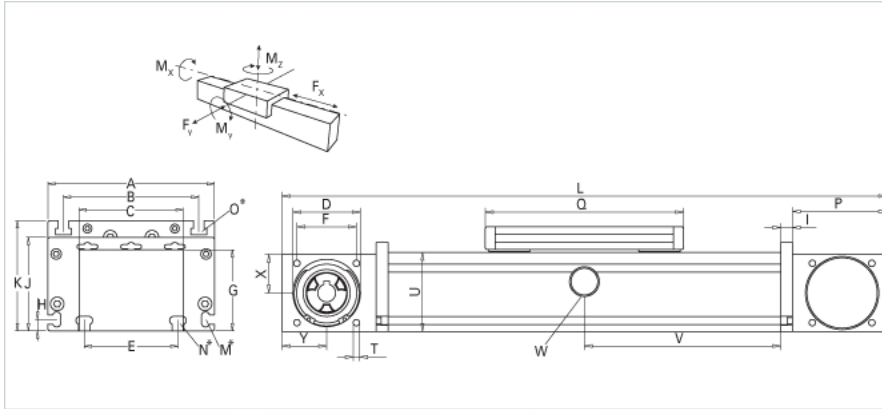


DSZ 120

Call 800-321-7800 or visit us online at www.nookindustries.com to configure and order your DSZ 120 today!

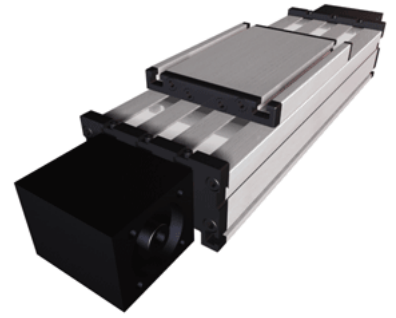

Details

Size	120
Belt	5M25/8M50
mm/Rev	130/176
Number of Teeth	26/22

Dimensions

Basic Length L [mm]	330
A [mm]	120
B [mm]	96
C [mm]	80
D [mm]	47
E [mm]	78
F [mm]	42
G [mm]	60
H [mm]	10
I [mm]	10
J [mm]	68
K [mm]	79
M	M5
N	M6
O	M6
P [mm]	70
Q [mm]	156
T	M6
U [mm]	60
X [mm]	30
Y [mm]	35

Speed

Speed Maximum [m/s]	5
---------------------	---

Forces and Torques

No-load torque with cover bands	1.6
No-load torque without cover bands	1.2
F _x [N] 10000 km	800
F _y [N] 10000 km	1405
F _z [N] 10000 km	1650
M _x [Nm] 10000 km	64
M _y [Nm] 10000 km	77
M _z [Nm] 10000 km	76
F _x [N] 5000 km	894
F _y [N] 5000 km	1776
F _z [N] 5000 km	2090
M _x [Nm] 5000 km	81
M _y [Nm] 5000 km	97
M _z [Nm] 5000 km	96
Tensile force 0.2 sec [N]	1000
Tensile force permanent [N]	900

Geometrical moments of inertia of aluminum profile

Elastic modulus [N/mm ²]	70000
I _x [mm ⁴]	561000
I _y [mm ⁴]	3419000

Weight

Additional Weight per 100 mm [kg]	0.85
Basic Weight [kg]	5.1

Values for Calculating Inertias

Pulley Material	Aluminum
Pulley Diameter [mm]	41.38
Effective Pulley Width [mm]	80
Belt Weight [kg/m]	0.123
Standard Carriage Weight [kg]	0.92
No-load torque (w/cover bands) [Nm]	1.6
No-load torque (w/o cover bands) [Nm]	1.2
Friction Coefficient	0.01