




Call 800-321-7800 or visit us online at www.nookindustries.com to configure and order your DD-1020-HL/02XX today!

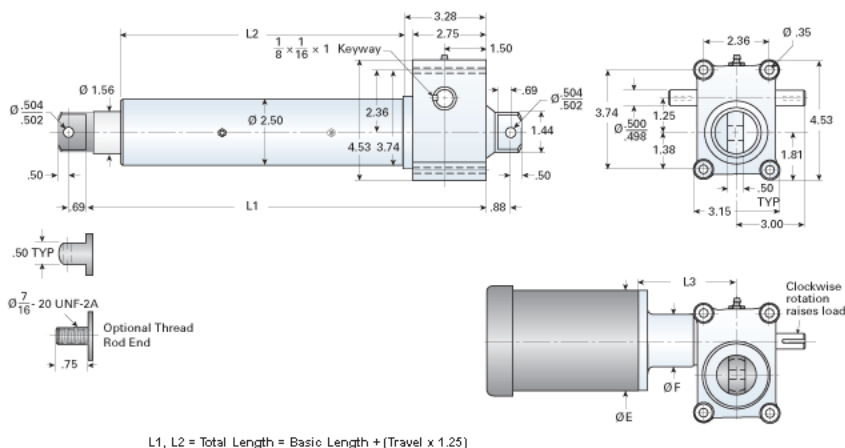

Performance Specifications	
Travel Rate [in/min]	43
Dynamic Capacity [lb]	800
Rated Life [in]	39000000
Motor Horse Power [hp]	0.25
Maximum Rod Reaction Torque [in-lb]	71
Std. Brake Torque [ft-lb]	0.8
Approximate Stopping Distance No Load [in]	0.15
Approximate Stopping Distance Full Load [in]	3.00
Details	
Gear Ratio	20:1
Input Turns Per Inch Of Travel	40
Torque To Raise 1 lb. [in-lb]	0.0114
Max Capacity [lb]	2000
Max HP [hp]	0.25
Weight	
Basic Weight [lb]	19
Per Inch of Travel [lb]	0.77
Tube Dimensions	
L1 Basic Length [in]	10.75
L2 Basic Length [in]	6.38
NEMA 42 Dimensions	
L3 [in]	4.48
E [in]	4.63
F [in]	2.63
NEMA 48 Dimensions	
L3 [in]	4.48
E [in]	4.63
F [in]	3.12
NEMA 56C Dimensions	
L3 [in]	5.71
E [in]	6.63
F [in]	3.75
NEMA 182TC Dimensions	
L3 [in]	-
E [in]	-
F [in]	-
NEMA 184TC Dimensions	
L3 [in]	-
E [in]	-
F [in]	-
NEMA 213TC Dimensions	
L3 [in]	-
E [in]	-
F [in]	-