


ILA-100 SL

Call 800-321-7800 or visit us online at www.nookindustries.com to configure and order your ILA-100 SL today!

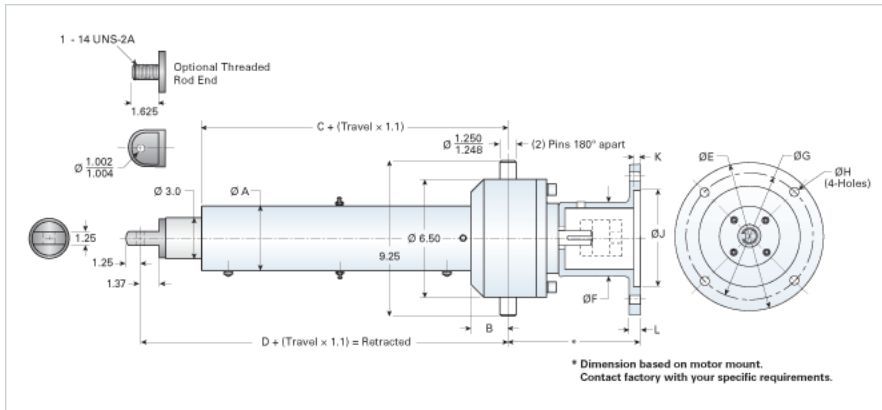

Performance Specifications

Maximum Travel Rate [in/min]	3750
Dynamic Capacity [lb]	2500
Maximum Input Torque [in-lb]	830

Dimensions

A	4
B	2.5
C	16
D	19

Details

Ball Screw	1500-1875 SRT
Input Turns per Inch Of Travel	0.53
Torque to Raise 1 lb. [in-lb]	0.332
Screw Lead [in]	1.875
Root Diameter [in]	1.188
Max Capacity [lb]	2500
Max HP [hp]	5
Gear Ratio	1:1

Weight

Basic Weight [lb]	89
Per Inch of Travel [lb]	2.08