
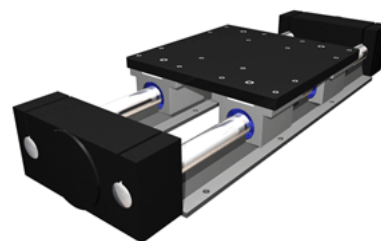


## PowerTrax 251-16-LXX

Call 800-321-7800 or visit us online at [www.nookindustries.com](http://www.nookindustries.com) to configure and order your PowerTrax 251-16-LXX today!

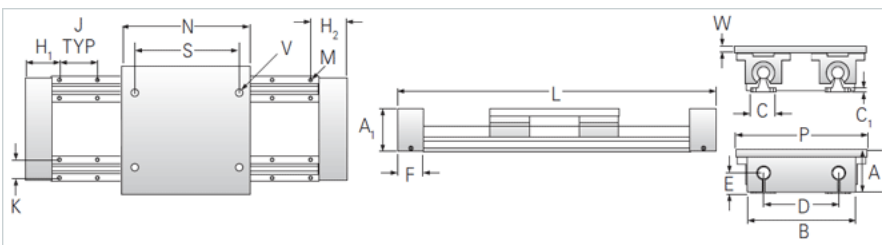

### Product Info

|                             |      |
|-----------------------------|------|
| Nominal Shaft Diameter [in] | 1.00 |
|-----------------------------|------|

### Dimensions

|                                   |        |
|-----------------------------------|--------|
| A +/-0.003 [in]                   | 3.438  |
| A1 [in]                           | 3.25   |
| B [in]                            | 7.25   |
| C [in]                            | 2.13   |
| C1 [in]                           | 0.25   |
| D [in]                            | 5.50   |
| E [in]                            | 1.75   |
| F [in]                            | 2.2    |
| H [in]                            | 3.00   |
| J +/-0.010 [in]                   | 6.000  |
| K +/-0.010 [in]                   | 1.500  |
| M - Bolt                          | 1/4    |
| M - Hole [in]                     | 0.28   |
| N [in]                            | 9.00   |
| P [in]                            | 9.00   |
| S [in]                            | 7.00   |
| U [in]                            | 5.50   |
| V                                 | 3/8-16 |
| W [in]                            | 0.50   |
| Minimum L Dimension TRAVEL + [in] | 13.4   |

### Performance specifications

|                           |      |
|---------------------------|------|
| Load Maximum System [lbf] | 3320 |
|---------------------------|------|