




Call 800-321-7800 or visit us online at www.nookindustries.com to configure and order your DD-3012-HD today!

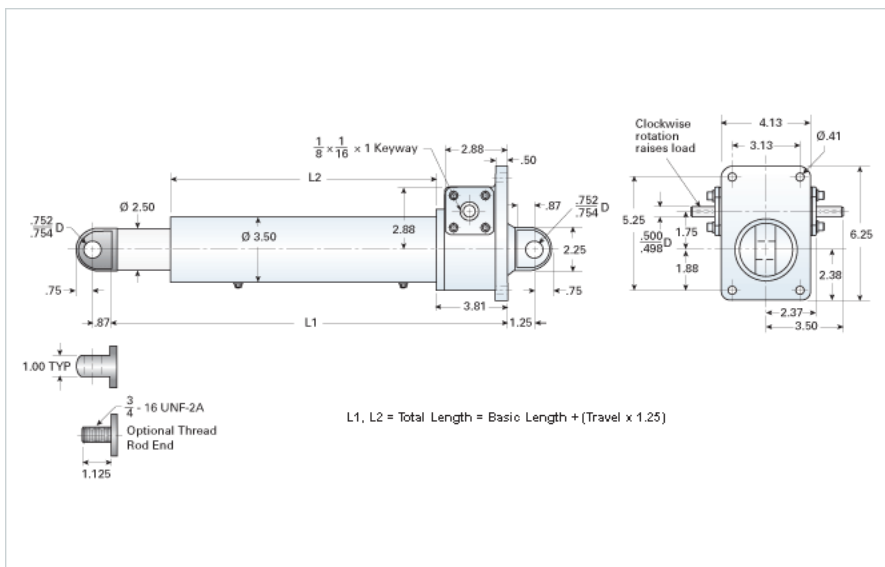

Details	
Gear Ratio	12:1
Max Capacity [lb]	6000
Input Turns Per Inch Of Travel	29.1
Torque To Raise 1 lb. [in-lb]	0.0169
Ball Screw	1171-0413 SRT RA
Screw Lead [in]	0.413
Root Diameter [in]	0.870
Max HP [hp]	1.5
Weight	
Basic Weight [lb]	38
Per Inch of Travel [lb]	1.31
Tube Dimensions	
L1 Basic Length [in]	12.44
L2 Basic Length [in]	7.13
NEMA 42 Dimensions	
L3 [in]	-
E [in]	-
F [in]	-
NEMA 48 Dimensions	
L3 [in]	-
E [in]	-
F [in]	-
NEMA 56C Dimensions	
L3 [in]	6.25
E [in]	6.62
F [in]	3.50
NEMA 182TC Dimensions	
L3 [in]	-
E [in]	-
NEMA 182TC/18TCc Dimensions	
F [in]	-
NEMA 184TC Dimensions	
L3 [in]	-
E [in]	-
F [in]	-
NEMA 213TC Dimensions	
L3 [in]	-
E [in]	-
F [in]	-