


## RAD-2566-HL

Call 800-321-7800 or visit us online at [www.nookindustries.com](http://www.nookindustries.com) to configure and order your RAD-2566-HL today!

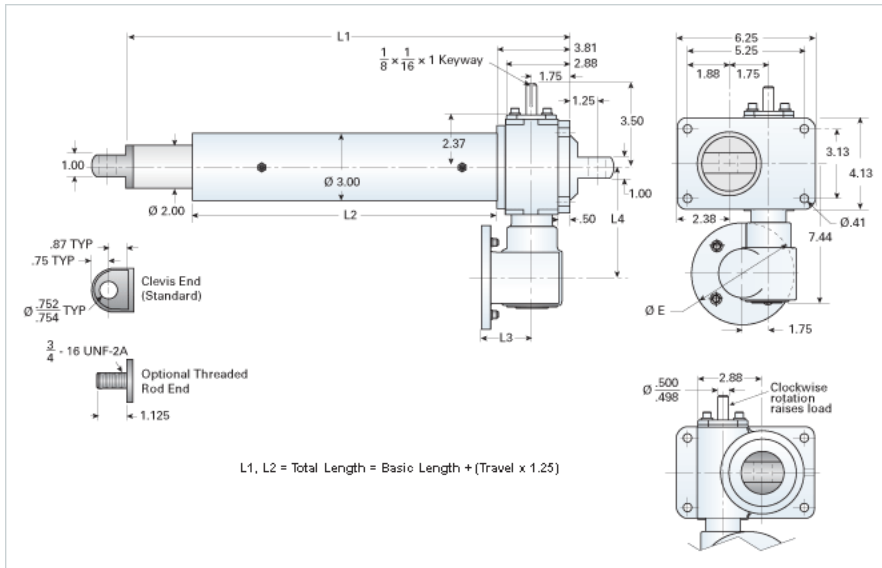

### Details

|                                |                  |
|--------------------------------|------------------|
| Gear Ratio Primary Reduction   | 6:1              |
| Gear Ratio Secondary Reduction | 6:1              |
| Max Capacity [lb]              | 5000             |
| Input Turns Per Inch Of Travel | 36               |
| Torque To Raise 1 lb. [in-lb]  | 0.0102           |
| Ball Screw                     | 1000-1000 SRT RA |
| Screw Lead [in]                | 1.000            |
| Root Diameter [in]             | 0.820            |
| Max HP [hp]                    | 1                |

### Weight

|                         |      |
|-------------------------|------|
| Basic Weight [lb]       | 46   |
| Per Inch of Travel [lb] | 1.05 |

### Tube Dimensions

|                      |       |
|----------------------|-------|
| L1 Basic Length [in] | 12.44 |
| L2 Basic Length [in] | 7.13  |

### NEMA 56C Dimensions

|         |      |
|---------|------|
| L3 [in] | 3.69 |
| L4 [in] | 5.63 |
| E [in]  | 6.69 |

### NEMA 180TC Dimensions

|         |   |
|---------|---|
| L3 [in] | - |
| L4 [in] | - |
| F [in]  | - |