




Call 800-321-7800 or visit us online at www.nookindustries.com to configure and order your RAD-10086-HL today!

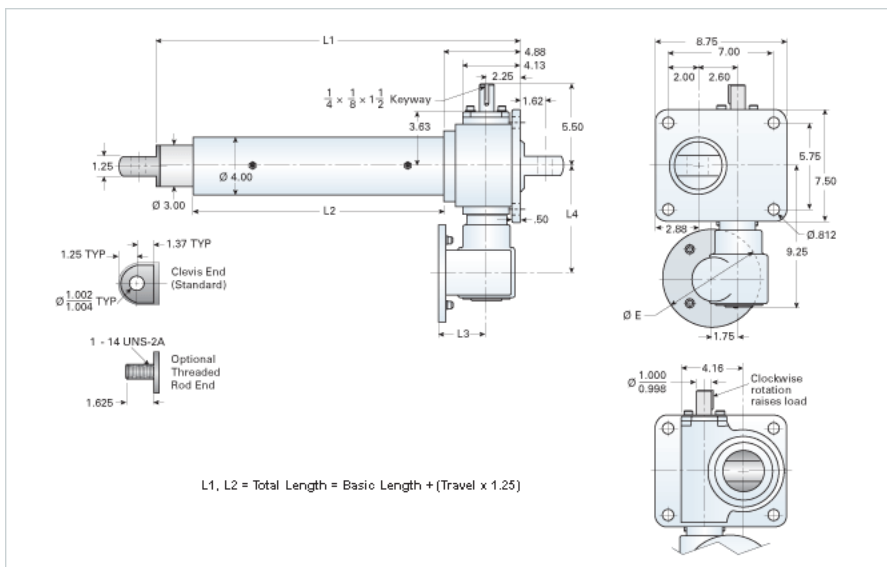

Gear Ratio Primary Reduction	8:1
Gear Ratio Secondary Reduction	6:1
Max Capacity [lb]	20000
Input Turns Per Inch Of Travel	48
Torque To Raise 1 lb. [in-lb]	0.0081
Ball Screw	1500-1000 SRT RA
Screw Lead [in]	1.000
Root Diameter [in]	1.140
Max HP [hp]	1

Basic Weight [lb]	93
Per Inch of Travel [lb]	1.92

L1 Basic Length [in]	15.25
L2 Basic Length [in]	8.88

L3 [in]	3.69
L4 [in]	7.25
E [in]	6.69

L3 [in]	-
L4 [in]	-
F [in]	-