


Product Specification Sheet

CCT28-HD C

Call 800-321-7800 or visit us online at www.nookindustries.com to configure and order your CCT28-HD C today!



Product Info

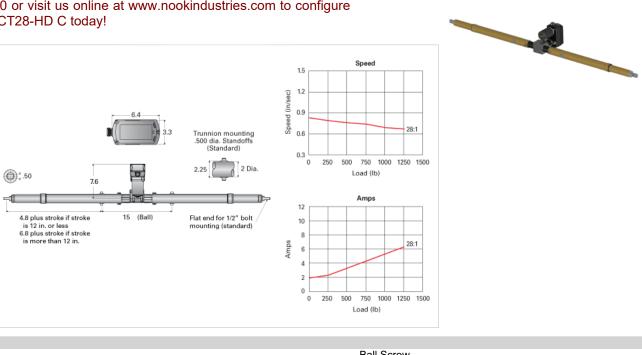

FIGUELING	
Screw Type	Ball Screw
Details	
Screw Size	0631-0200 SRT RA
Voltage	36 VDC
Gear Ratio	28:1
Load Capacity [lb]	1250
Speed [in/sec]	0.7
Amps	6
Trunnion -Trunnion [in]	15.5
Performance Specifications	
Duty Cycle [% of 5 Minutes]	25
Protection Class	IP54
Maximum Temperature Range [F°]	160
Minimum Temperature Range [F°]	-30