


MBN20x20R-4VW

Call 800-321-7800 or visit us online at www.nookindustries.com to configure and order your MBN20x20R-4VW today!

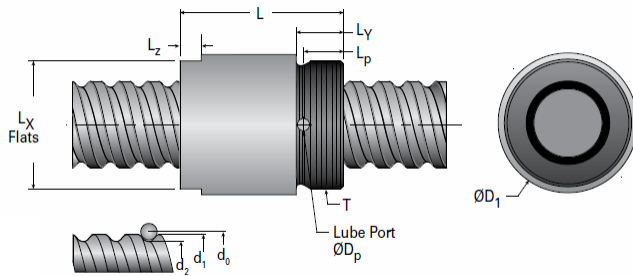

Product Info

| | |
|---------------------------|-------|
| Nominal Rod Diameter [mm] | 20 |
| Material | Alloy |
| Thread Direction | RH |

Details

| | |
|-------------------------------|-------|
| Lead [mm] | 20 |
| Active Turns | 4 |
| Nominal Ball Dia. [mm] | 3.500 |
| Screw Weight [kg/m] | 1.94 |
| Nut Weight [kg] | 0.25 |
| End Code for Types 1,2, and 3 | 15 |
| End Code for Types 4 | 10 |
| End Code for Types 5 | 15 |
| End Code for Types 6 | 15 |
| End Code for Types 7 | 15 |

Performance Specifications

| | |
|--|-------|
| Dynamic Load Ca [N] | 12110 |
| Static Load [N] | 22010 |
| Linear Speed (Based on DN Values) [mm/min] | 70000 |

Screw Dimensions

| | |
|---------|-------|
| d0 [mm] | 20 |
| d1 [mm] | 19.26 |
| d2 [mm] | 16.38 |

Nut Dimensions

| | |
|--------------|-----------|
| D1 (h8) [mm] | 43 |
| L [mm] | 36 |
| Lx [mm] | 40 |
| LY [mm] | 17 |
| Lz [mm] | 19 |
| Lp [mm] | 15.5 |
| Dp [mm] | 1.2 |
| T (6g) | M40 × 1.5 |