


## MBN25X5R-4VW

Call 800-321-7800 or visit us online at [www.nookindustries.com](http://www.nookindustries.com) to configure and order your MBN25X5R-4VW today!

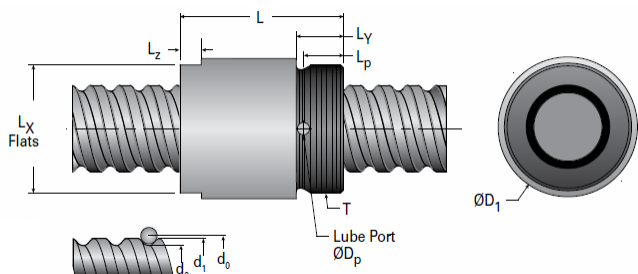

### Product Info

Nominal Rod Diameter [mm]	25
Material	Alloy
Thread Direction	RH

### Details

Lead [mm]	5
Active Turns	4
Nominal Ball Dia. [mm]	3.500
Screw Weight [kg/m]	3.21
Nut Weight [kg]	0.38
End Code for Types 1,2, and 3	20
End Code for Types 4	12
End Code for Types 5	20
End Code for Types 6	20
End Code for Types 7	20

### Performance Specifications

Dynamic Load Ca [N]	16380
Static Load [N]	32880
Linear Speed (Based on DN Values) [mm/min]	14000

### Screw Dimensions

d0 [mm]	25
d1 [mm]	24.26
d2 [mm]	21.38

### Nut Dimensions

D1 (h8) [mm]	43
L [mm]	63
Lx [mm]	40
LY [mm]	17
Lz [mm]	10
Lp [mm]	15
Dp [mm]	2.7
T (6g)	M40 × 1.5