




G1-MSJ-UR 2:1


Call 800-321-7800 or visit us online at www.nookindustries.com to configure and order your G1-MSJ-UR 2:1 today!

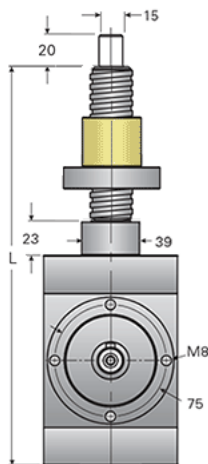

For ordering, specify "L" dimension
 $L(\text{min}) = \text{Travel} + 249$

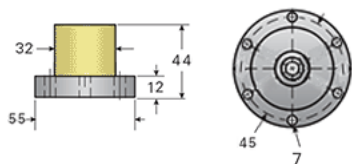

Ball nut position A
 Specify position B
 for opposite

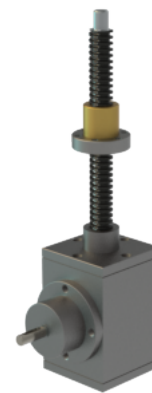

Details

| | |
|---------------------------------|------|
| Capacity [kN] | 20.6 |
| Gear Ratio | 2:1 |
| Raise for One Turn of Worm [mm] | 2.50 |
| Torque to Raise 1 kN [Nm] | 0.88 |
| Tare Drag Torque [Nm] | 1.80 |
| Lifting Screw Diameter [mm] | 24 |
| Screw Lead [mm] | 5 |
| BackDrive Holding Torque [Nm] | 1.06 |

Performance Specifications

| | |
|---------------------------|----|
| Maximum Input Torque [Nm] | 50 |
|---------------------------|----|

Weight

| | |
|--------------------------|------|
| Base 0 Travel [kg] | 7.70 |
| Per 100mm of Travel [kg] | 0.32 |
| Grease [kg] | 0.22 |