
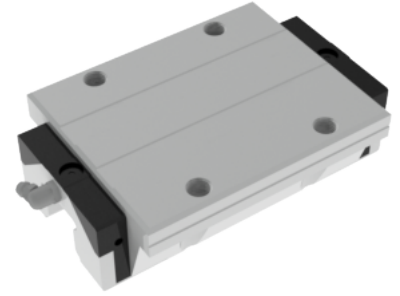



NHRC 25 FL

Call 800-321-7800 or visit us online at www.nookindustries.com to configure and order your NHRC 25 FL today!



| Details | |
|--------------------------------|--------------|
| Size [mm] | 25 |
| Dimensions | |
| W [mm] | 70 |
| L [mm] | 105 |
| L1 [mm] | 86 |
| h2 [mm] | 30 |
| P1 [mm] | 45 |
| P2 [mm] | 57 |
| M1 [mm] | M6 Thru Bolt |
| M × g2 | M8 × 12 |
| T [mm] | 12 |
| N1 | M6 × 7.5 |
| N2 | M3 × 6.5 |
| N3 [O-Ring Seal] | P4 |
| E [mm] | 12 |
| S1 [mm] | 8 |
| S2 [mm] | 12.3 |
| S3 [mm] | 23.5 |
| S4 [mm] | 24.5 |
| Forces and Torques | |
| Basic Load Ratings C [kN] | 30.7 |
| Basic Load Ratings C0 [kN] | 57.7 |
| Static Moment Ratings-Ma [N-m] | 710.0 |
| Static Moment Ratings-Mb [N-m] | 710.0 |
| Static Moment Ratings-Mc [N-m] | 735.0 |
| Weight | |
| Weight-Block [g] | 605 |