
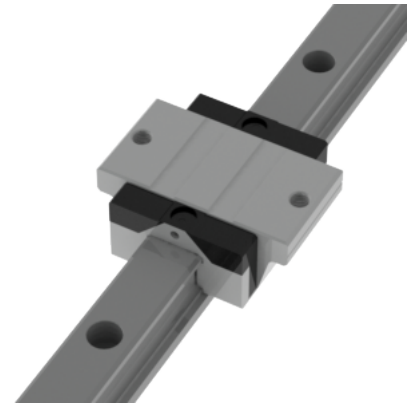


## NARC 20 FS Assembly

Call 800-321-7800 or visit us online at [www.nookindustries.com](http://www.nookindustries.com) to configure and order your NARC 20 FS Assembly today!

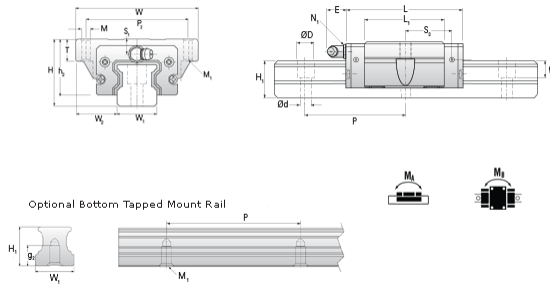

|   |              |
|---|--------------|
| <b>Dimensions</b>   |              |
| H [mm]  | 28           |
| W2 [mm]   | 19.5         |
| <b>Short Caged Ball Block Two Perpendiculare Mounting Holes</b> |              |
| <b>(Runner Block)Details</b>                                    |              |
| Size [mm]   | 20           |
| <b>(Runner Block)Dimensions</b>                                 |              |
| W [mm]  | 59           |
| L [mm]  | 49.2         |
| L1 [mm]   | 32.2         |
| h2 [mm]   | 23           |
| P2 [mm]   | 49           |
| M1 [mm]   | M5 Thru Bolt |
| M x g2  | M6 x 10      |
| T [mm]  | 10           |
| N1  | M3 x 7.5     |
| N2  | M3 x 5.5     |
| N3 [O-Ring Seal]  | P4           |
| E [mm]  | 10           |
| S1 [mm]   | 4            |
| S2 [mm]   | 7.4          |
| S3 [mm]   | 19.1         |
| S4 [mm]   | 19.8         |
| <b>(Runner Block)Forces and Torques</b>                         |              |
| Basic Load Ratings C [kN]                                       | 12.5         |
| Basic Load Ratings C0 [kN]                                      | 19.3         |
| Static Moment Ratings-Ma [N-m]                                  | 100.0        |
| Static Moment Ratings-Mb [N-m]                                  | 80.0         |
| Static Moment Ratings-Mc [N-m]                                  | 205.0        |
| <b>(Runner Block)Weight</b>                                     |              |
| Weight-Block [g]  | 210          |
| <b>Caged Ball Rail Top Mount</b>                                |              |
| <b>(Top Mount Rail)Details</b>                                  |              |
| Size [mm]   | 20           |
| <b>(Top Mount Rail)Dimensions</b>                               |              |
| W1 [mm]   | 20           |
| H1 [mm]   | 20           |
| P [mm]  | 60           |
| D [mm]  | 9.5          |
| d1 [mm]   | 6            |
| g1 [mm]   | 8.5          |
| <b>(Top Mount Rail)Weight</b>                                   |              |
| Weights-Rail [g/m]  | 2280.0       |
| <b>Caged Ball Rail Bottom Tapped Mount</b>                      |              |
| <b>(Bottom Mount Rail)Details</b>                               |              |
| Size [mm]   | 20           |
| <b>(Bottom Mount Rail)Dimensions</b>                            |              |
| W1 [mm]   | 20           |
| H1 [mm]   | 20           |
| P [mm]  | 60           |
| M x g3  | M6 x 10      |
| <b>(Bottom Mount Rail)Weight</b>                                |              |
| Weights-Rail [g/m]  | 2280.0       |