


## PowerAC 5/8"-10 RA

Call 800-321-7800 or visit us online at [www.nookindustries.com](http://www.nookindustries.com) to configure and order your PowerAC 5/8"-10 RA today!

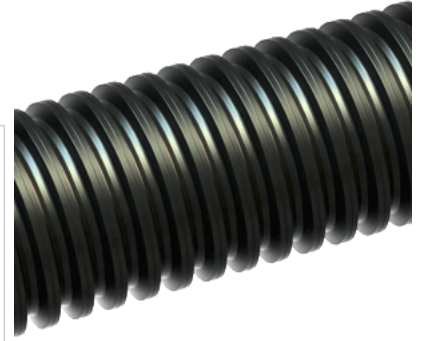

### Product Info

Screw Code	060-RA
Thread Direction	RH
Screw Material	4140 Series

### Details

Lead [in]	0.100
Starts	1
Pitch [in]	0.100
Turns Per Inch	10
Threads per Inch	10
Thread Code	060
Form	Stub
End Code for Types 1,2,3,5 [* Journals may show tracings of the thread]	12
End Code for Type 4 [* Journals may show tracings of the thread]	8

### Dimensions

A - Root Diameter Minimum [in]	0.516
D - Nominal Rod Diameter [in]	0.625

### Part Numbers

3 ft. Part Number	11060
6 ft. Part Number	12060
12 ft. Part Number	13060
20 ft. Part Number	

### Performance Specifications

Lead Accuracy +/- [in/in]	0.0003
---------------------------	--------

### Weight

Screw Weight [lb./ft.]	0.87
------------------------	------