


## PowerAC 3/4"-3 RA

Call 800-321-7800 or visit us online at [www.nookindustries.com](http://www.nookindustries.com) to configure and order your PowerAC 3/4"-3 RA today!

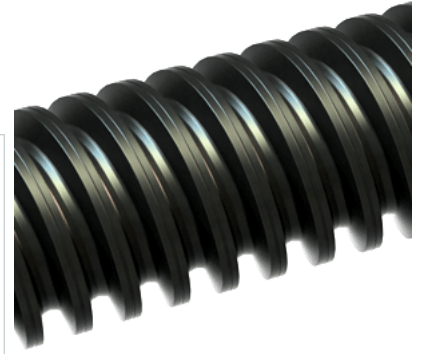

### Product Info

|                  |             |
|------------------|-------------|
| Screw Code       | 073-RA      |
| Thread Direction | RH          |
| Screw Material   | 4140 Series |

### Details

|   |       |
|---|-------|
| Lead [in]   | 0.333 |
| Starts  | 2     |
| Pitch [in]  | 0.167 |
| Turns Per Inch  | 3     |
| Threads per Inch  | 6     |
| Thread Code   | 073   |
| Form  | 2C    |
| End Code for Types 1,2,3,5 [* Journals may show tracings of the thread] | 12    |
| End Code for Type 4 [* Journals may show tracings of the thread]        | 8     |

### Dimensions

|                                |       |
|--------------------------------|-------|
| A - Root Diameter Minimum [in] | 0.537 |
| D - Nominal Rod Diameter [in]  | 0.750 |

### Part Numbers

|                    |       |
|--------------------|-------|
| 3 ft. Part Number  | 11073 |
| 6 ft. Part Number  | 12073 |
| 12 ft. Part Number | 13073 |
| 20 ft. Part Number |       |

### Performance Specifications

|                           |        |
|---------------------------|--------|
| Lead Accuracy +/- [in/in] | 0.0003 |
|---------------------------|--------|

### Weight

|                        |      |
|------------------------|------|
| Screw Weight [lb./ft.] | 1.17 |
|------------------------|------|