


## PowerAC 1 1/4"-5 RA

Call 800-321-7800 or visit us online at [www.nookindustries.com](http://www.nookindustries.com) to configure and order your PowerAC 1 1/4"-5 RA today!

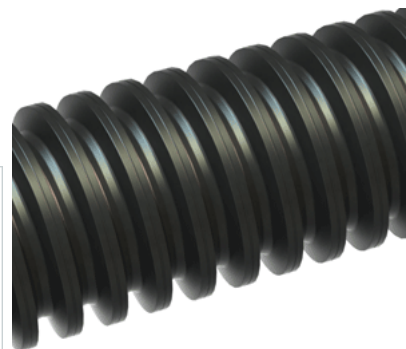

### Product Info

Screw Code	125-RA
Thread Direction	RH
Screw Material	4140 Series

### Details

Lead [in]	0.200
Starts	1
Pitch [in]	0.200
Turns Per Inch	5
Threads per Inch	5
Thread Code	125
Form	2C
End Code for Types 1,2,3,5 [* Journals may show tracings of the thread]	25
End Code for Type 4 [* Journals may show tracings of the thread]	16

### Dimensions

A - Root Diameter Minimum [in]	0.999
D - Nominal Rod Diameter [in]	1.250

### Part Numbers

3 ft. Part Number	11125
6 ft. Part Number	12125
12 ft. Part Number	13125
20 ft. Part Number	

### Performance Specifications

Lead Accuracy +/- [in/in]	0.0003
---------------------------	--------

### Weight

Screw Weight [lb./ft.]	3.49
------------------------	------