


## PowerTrac XPR 1150 - 0200 RH

Call 800-321-7800 or visit us online at [www.nookindustries.com](http://www.nookindustries.com) to configure and order your PowerTrac XPR 1150 - 0200 RH today!

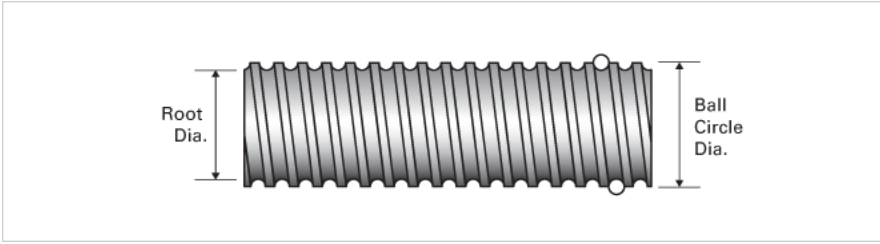

| <b>Product Info</b>   |                  |
|---|------------------|
| Screw Code  | 1150-0200 XPR RA |
| Precision   | XPR              |
| Screw Material  | 4150             |
| Thread Direction  | RH               |
| <b>Details</b>  |                  |
| Ball Circle Diameter [in]   | 1.150            |
| Lead [in]   | 0.200            |
| Root Diameter [in]  | 1.015            |
| End Code for Types 1,2,3,5 [* Journals may show tracings of the thread] | 25               |
| End Code for Type 4 [* Journals may show tracings of the thread]        | 16               |
| <b>Performance Specifications</b>                                       |                  |
| Lead Accuracy +/- [in./ft.]   | 0.0010           |
| <b>Part Numbers</b>   |                  |
| 2 ft. Part Number   |                  |
| 4 ft. Part Number   |                  |
| 6 ft. Part Number   | XPR11520R72      |
| 8 ft. Part Number   |                  |
| 12 ft. Part Number  | XPR11520R144     |
| 16 ft. Part Number  |                  |
| 20 ft. Part Number  |                  |
| <b>Weight</b>   |                  |
| Screw Weight [lb./ft.]  | 3.18             |