


## PowerTrac SRT 1250 - 0500 RH

Call 800-321-7800 or visit us online at [www.nookindustries.com](http://www.nookindustries.com) to configure and order your PowerTrac SRT 1250 - 0500 RH today!

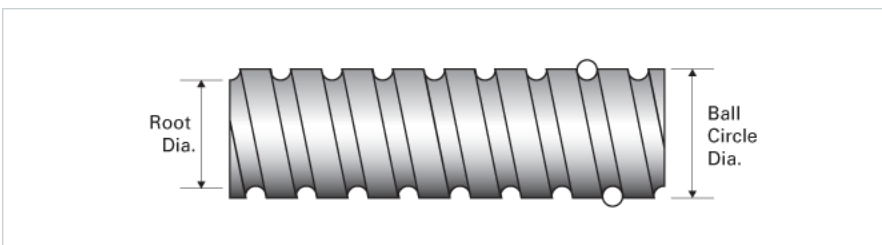

<b>Product Info</b>	
Screw Code	1250-0500 SRT RA
Precision	SRT
Screw Material	4150
Thread Direction	RH
<b>Details</b>	
Ball Circle Diameter [in]	1.250
Lead [in]	0.500
Root Diameter [in]	1.050
End Code for Types 1,2,3,5 [* Journals may show tracings of the thread]	25
End Code for Type 4 [* Journals may show tracings of the thread]	16
<b>Performance Specifications</b>	
Lead Accuracy +/- [in./ft.]	0.0040
<b>Part Numbers</b>	
2 ft. Part Number	
4 ft. Part Number	SRT1254
6 ft. Part Number	
8 ft. Part Number	SRT1258
12 ft. Part Number	SRT1252
16 ft. Part Number	SRT1256
20 ft. Part Number	
<b>Weight</b>	
Screw Weight [lb./ft.]	3.70