
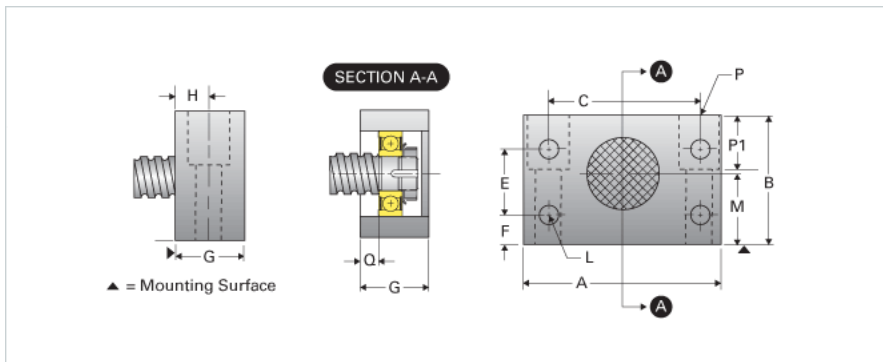


## EZZE-MOUNT EZM-4009

Call 800-321-7800 or visit us online at [www.nookindustries.com](http://www.nookindustries.com) to configure and order your EZZE-MOUNT EZM-4009 today!

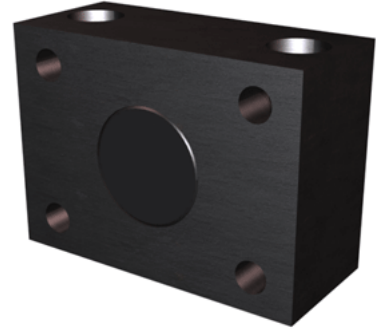

### Product Info

|                                   |          |
|-----------------------------------|----------|
| Part Number                       | EZM-4009 |
| Machined End Code                 | 9        |
| Nominal Bearing Journal Size [mm] | 9        |

### Dimensions

|                           |            |
|---------------------------|------------|
| A [in]                    | 2.75       |
| B [in]                    | 2.00       |
| C [in]                    | 2.00       |
| E [in]                    | 1.38       |
| F [in]                    | 0.31       |
| G [in]                    | 1.19       |
| H [in]                    | 0.56       |
| L Holes [Number of Holes] | 4          |
| L Thru [in]               | 0.28       |
| M [in]                    | 1.000      |
| P C Bore [in]             | 0.50       |
| P P1 [in]                 | 0.56       |
| Q [in]                    | 0.38       |
| P - Bolt Size (2 or 4)    | 5/16 x2(2) |
| P-Thru [in]               | 0.34       |

### Weight

|             |      |
|-------------|------|
| Weight [lb] | 1.40 |
|-------------|------|