


## EZZE-MOUNT EZM-4012

Call 800-321-7800 or visit us online at [www.nookindustries.com](http://www.nookindustries.com) to configure and order your EZZE-MOUNT EZM-4012 today!

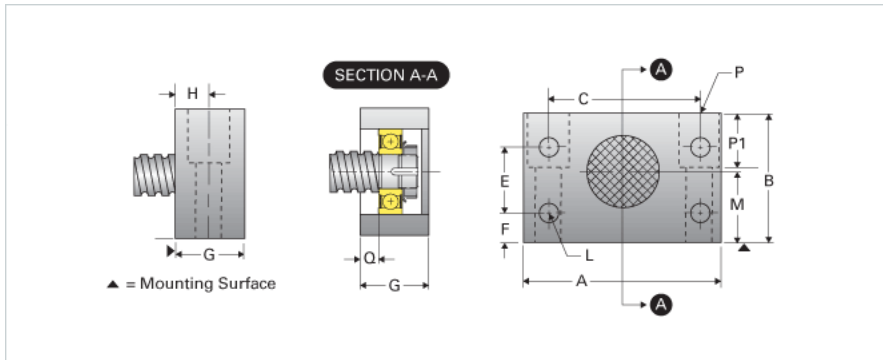

### Product Info

|                                   |          |
|-----------------------------------|----------|
| Part Number                       | EZM-4012 |
| Machined End Code                 | 12       |
| Nominal Bearing Journal Size [mm] | 12       |

### Dimensions

|                           |                |
|---------------------------|----------------|
| A [in]                    | 3.50           |
| B [in]                    | 2.22           |
| C [in]                    | 2.75           |
| E [in]                    | 1.25           |
| F [in]                    | 0.50           |
| G [in]                    | 1.38           |
| H [in]                    | 0.69           |
| L Holes [Number of Holes] | 4              |
| L Thru [in]               | 0.28           |
| M [in]                    | 1.187          |
| P C Bore [in]             | 0.62           |
| P P1 [in]                 | 1.00           |
| Q [in]                    | 0.33           |
| P - Bolt Size (2 or 4)    | 3/8 x 1 3/4(2) |
| P-Thru [in]               | 0.41           |

### Weight

|             |      |
|-------------|------|
| Weight [lb] | 2.08 |
|-------------|------|