


## PowerTrac 0631 - 0200 SRT RA, with SEL Ball Nut, Adjustable

Call 800-321-7800 or visit us online at [www.nookindustries.com](http://www.nookindustries.com) to configure and order your PowerTrac 0631 - 0200 SRT RA, with SEL Ball Nut,

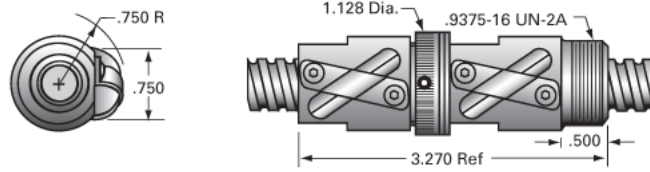

### Inch Ball Screw

#### Product Info

Screw Code	0631-0200 SRT RA
Precision	SRT
Screw Material	4150
Thread Direction	RH

#### Details

Ball Circle Diameter [in]	0.631
Lead [in]	0.200
Root Diameter [in]	0.500
End Code for Types 1,2,3,5 [* Journals may show tracings of the thread]	12
End Code for Type 4 [* Journals may show tracings of the thread]	8

#### Performance Specifications

Lead Accuracy +/- [in./ft.]	0.0040
-----------------------------	--------

#### Part Numbers

2 ft. Part Number	SRT9392
4 ft. Part Number	SRT9987
6 ft. Part Number	SRT7540
8 ft. Part Number	
12 ft. Part Number	
16 ft. Part Number	
20 ft. Part Number	

#### Weight

Screw Weight [lb./ft.]	0.82
------------------------	------

### Inch Ball Nut, for SRT, Standard Accuracy, Preloaded, Adjustable, SEL

#### Product Info

Ball Nut Number	SEL10408
Thread Direction	RH

#### Details

Ball Circle Diameter [in]	0.631
Lead [in]	0.200
Nominal Ball Diameter [in]	0.125
Root diameter [in]	0.500

#### Forces and Torques

Torque to Raise 1 lb. [in-lb]	0.035
-------------------------------	-------

#### Flange Part Numbers

Flange Part Number	FLG7570
--------------------	---------

#### Wiper Part Numbers

Wiper Kit Part Number	WKB10407
-----------------------	----------

#### Weight

Nut Weight [lb]	0.65
-----------------	------

#### Performance Specifications

Lead Accuracy +/- [in./ft.]	0.004
Maximum Adjustable Preload [lb]	233
Spring Rate x 10 <sup>6</sup> [lb./in.]	
Dynamic Load [lb]	815
Static Load [lb]	6384