


## PowerAC 2 1/4"-2 RA

Call 800-321-7800 or visit us online at [www.nookindustries.com](http://www.nookindustries.com) to configure and order your PowerAC 2 1/4"-2 RA today!

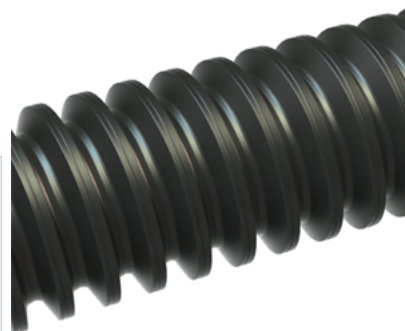

### Product Info

Screw Code	222-RA
Thread Direction	RH
Screw Material	4140 Series

### Details

Lead [in]	0.500
Starts	1
Pitch [in]	0.500
Turns Per Inch	2
Threads per Inch	2
Thread Code	222
Form	40
End Code for Types 1,2,3,5 [* Journals may show tracings of the thread]	40
End Code for Type 4 [* Journals may show tracings of the thread]	24

### Dimensions

A - Root Diameter Minimum [in]	1.684
D - Nominal Rod Diameter [in]	2.250

### Part Numbers

3 ft. Part Number	11222
6 ft. Part Number	12222
12 ft. Part Number	13222
20 ft. Part Number	

### Performance Specifications

Lead Accuracy +/- [in/in]	0.0003
---------------------------	--------

### Weight

Screw Weight [lb./ft.]	10.58
------------------------	-------