




PowerTrac SRT 6000 - 1000 RH

Call 800-321-7800 or visit us online at www.nookindustries.com to configure and order your PowerTrac SRT 6000 - 1000 RH today!

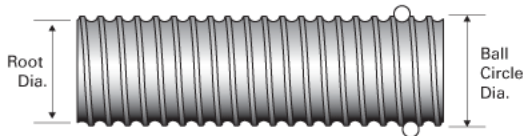

Product Info

| | |
|------------------|------------------|
| Screw Code | 6000-1000 SRT RA |
| Precision | SRT |
| Screw Material | 4150 |
| Thread Direction | RH |

Details

| | |
|---|-------|
| Ball Circle Diameter [in] | 6.000 |
| Lead [in] | 1.000 |
| Root Diameter [in] | 5.232 |
| End Code for Types 1,2,3,5 [* Journals may show tracings of the thread] | n/a |
| End Code for Type 4 [* Journals may show tracings of the thread] | n/a |

Performance Specifications

| | |
|-----------------------------|--------|
| Lead Accuracy +/- [in./ft.] | 0.0080 |
|-----------------------------|--------|

Part Numbers

| |
|--------------------|
| 2 ft. Part Number |
| 4 ft. Part Number |
| 6 ft. Part Number |
| 8 ft. Part Number |
| 12 ft. Part Number |
| 16 ft. Part Number |
| 20 ft. Part Number |

Weight

| | |
|------------------------|-------|
| Screw Weight [lb./ft.] | 34.40 |
|------------------------|-------|