


## PowerAC 1"-6 LS

Call 800-321-7800 or visit us online at [www.nookindustries.com](http://www.nookindustries.com) to configure and order your PowerAC 1"-6 LS today!

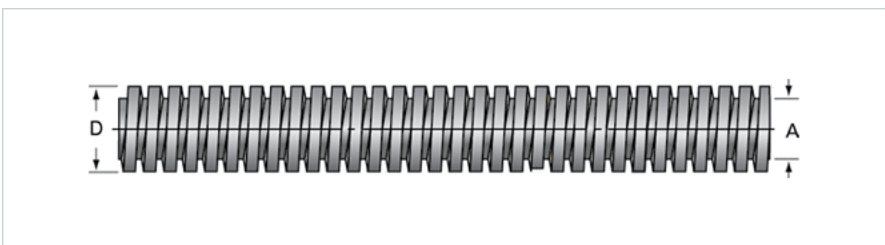

### Product Info

Screw Code	106-LS
Thread Direction	LH
Screw Material	300 Series Stainless

### Details

Lead [in]	0.167
Starts	1
Pitch [in]	0.167
Turns Per Inch	6
Threads per Inch	6
Thread Code	106
Form	2C
End Code for Types 1,2,3,5 [* Journals may show tracings of the thread]	17
End Code for Type 4 [* Journals may show tracings of the thread]	10

### Dimensions

A - Root Diameter Minimum [in]	0.786
D - Nominal Rod Diameter [in]	1.000

### Part Numbers

3 ft. Part Number	94106
6 ft. Part Number	95106
12 ft. Part Number	96106
20 ft. Part Number	

### Performance Specifications

Lead Accuracy +/- [in/in]	0.0003
---------------------------	--------

### Weight

Screw Weight [lb./ft.]	2.16
------------------------	------