


## PowerAC 6"-1 1/2 RA

Call 800-321-7800 or visit us online at [www.nookindustries.com](http://www.nookindustries.com) to configure and order your PowerAC 6"-1 1/2 RA today!

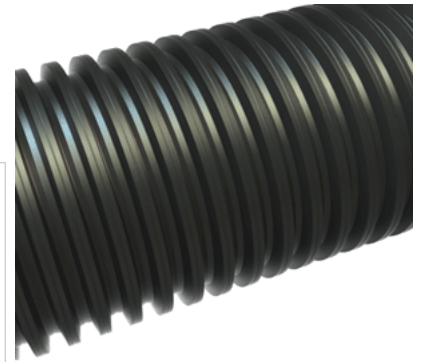

### Product Info

Screw Code	602-RA
Thread Direction	RH
Screw Material	4140 Series

### Details

Lead [in]	0.667
Starts	1
Pitch [in]	0.667
Turns Per Inch	1.5
Threads per Inch	1.5
Thread Code	602
Form	2G
End Code for Types 1,2,3,5 [* Journals may show tracings of the thread]	n/a
End Code for Type 4 [* Journals may show tracings of the thread]	n/a

### Dimensions

A - Root Diameter Minimum [in]	5.254
D - Nominal Rod Diameter [in]	6.000

### Part Numbers

3 ft. Part Number	
6 ft. Part Number	12602
12 ft. Part Number	13602
20 ft. Part Number	10602

### Performance Specifications

Lead Accuracy +/- [in/in]	0.0006
---------------------------	--------

### Weight

Screw Weight [lb./ft.]	87.00
------------------------	-------