


PowerTrac 0500 - 0500 SRT RA, with SBN Ball Nut, Nickel Plated,

Call 800-321-7800 or visit us online at www.nookindustries.com to configure and order your PowerTrac 0500 - 0500 SRT RA, with SBN Ball Nut, Nickel

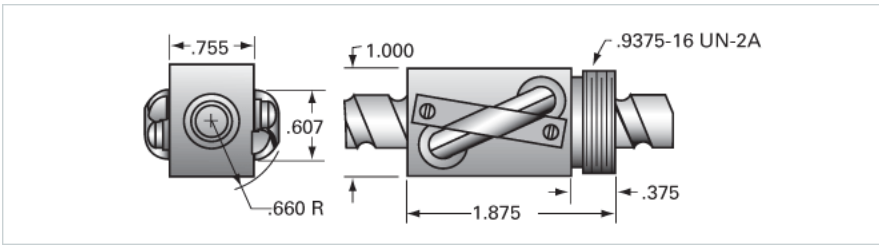

Inch Ball Screw	
Product Info	
Screw Code	0500-0500 SRT RS
Precision	SRT
Screw Material	17-4 PH Stainless
Thread Direction	RH
Details	
Ball Circle Diameter [in]	0.500
Lead [in]	0.500
Root Diameter [in]	0.360
End Code for Types 1,2,3,5 [* Journals may show tracings of the thread]	8
End Code for Type 4 [* Journals may show tracings of the thread]	6
Performance Specifications	
Lead Accuracy +/- [in./ft.]	0.0040
Part Numbers	
2 ft. Part Number	SRT6700
4 ft. Part Number	SRT6704
6 ft. Part Number	SRT6846
8 ft. Part Number	
12 ft. Part Number	
16 ft. Part Number	
20 ft. Part Number	
Weight	
Screw Weight [lb./ft.]	0.50
Inch Ball Nut, for SRT, Standard Accuracy, No Preload, SBN, Nickel Plated	
Product Info	
Ball Nut Number	SBN9582E
Thread Direction	RH
Details	
Ball Circle Diameter [in]	0.500
Lead [in]	0.500
Nominal Ball Diameter [in]	0.125
Root diameter [in]	0.360
Forces and Torques	
Torque to Raise 1 lb. [in-lb]	0.088
Flange Part Numbers	
Flange Part Number	FLG7570
Wiper Part Numbers	
Wiper Kit Part Number	-
Weight	
Nut Weight [lb]	0.27
Performance Specifications	
Lead Accuracy +/- [in./ft.]	0.004
Maximum Adjustable Preload [lb]	
Spring Rate x 10 ⁶ [lb./in.]	
Dynamic Load [lb]	786
Static Load [lb]	4131