


## NHRC 15 FN Assembly

Call 800-321-7800 or visit us online at [www.nookindustries.com](http://www.nookindustries.com) to configure and order your NHRC 15 FN Assembly today!

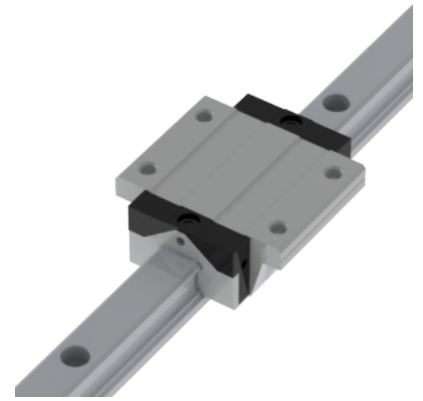

<b>Dimensions</b>	
H [mm]	24
W2 [mm]	16
<b>Standard Caged Ball Block Four Mounting Holes</b>	
<b>Details</b>	
Size [mm]	15
<b>Dimensions</b>	
W [mm]	47
L [mm]	55.5
L1 [mm]	40.3
h2 [mm]	20.7
P1 [mm]	30
P2 [mm]	38
M1 [mm]	M4 Thru Bolt
M x g2	M5 x 7
T [mm]	7
N1	M3 x 6.5
N2	M3 x 6
N3 [O-Ring Seal]	P3
E [mm]	3.5
S1 [mm]	4.5
S2 [mm]	7.5
S3 [mm]	7.8
S4 [mm]	8.9
<b>Forces and Torques</b>	
Basic Load Ratings C [kN]	9.9
Basic Load Ratings C0 [kN]	17.5
Static Moment Ratings-Ma [N-m]	105.0
Static Moment Ratings-Mb [N-m]	105.0
Static Moment Ratings-Mc [N-m]	140.0
<b>Weight</b>	
Weight-Block [g]	174
<b>Caged Ball Rail Top Mount</b>	
<b>Details</b>	
Size [mm]	15
<b>Dimensions</b>	
W1 [mm]	15
H1 [mm]	15
P [mm]	60
D [mm]	7.5
d1 [mm]	4.5
g1 [mm]	5.3
<b>Weight</b>	
Weights-Rail [g/m]	1290.0
<b>Caged Ball Rail Bottom Tapped Mount</b>	
<b>Details</b>	
Size [mm]	15
<b>Dimensions</b>	
W1 [mm]	15
H1 [mm]	15
P [mm]	60
M x g3	M5 x 8
<b>Weight</b>	
Weights-Rail [g/m]	1290.0