


NMR 12WN EU Assembly

Call 800-321-7800 or visit us online at www.nookindustries.com to configure and order your NMR 12WN EU Assembly today!

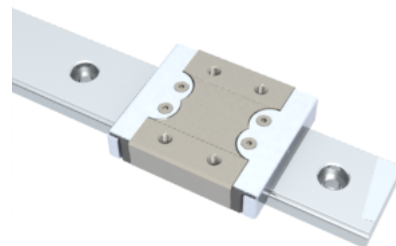

Dimensions

| | |
|---------|----|
| H [mm] | 14 |
| W2 [mm] | 8 |

Wide Miniature Block Four Mounting Holes (Runner Block)Details

| | |
|-----------|----|
| Size [mm] | 12 |
|-----------|----|

(Runner Block)Dimensions

| | |
|---------|----------|
| W [mm] | 40 |
| L [mm] | 45.8 |
| L1 [mm] | 31 |
| h2 [mm] | 11 |
| P1 [mm] | 15 |
| P2 [mm] | 28 |
| M × g2 | M3 × 3.5 |
| Ø [mm] | 1.3 |
| S [mm] | 3.1 |
| T [mm] | 4.5 |

(Runner Block)Forces and Torques

| | |
|--------------------------------|------|
| Basic Load Ratings C [N] | 3065 |
| Basic Load Ratings C0 [N] | 5200 |
| Static Moment Ratings-Ma [N-m] | 63.7 |
| Static Moment Ratings-Mb [N-m] | 26.3 |
| Static Moment Ratings-Mc [N-m] | 26.3 |

(Runner Block)Weight

| | |
|------------------|----|
| Weight-Block [g] | 68 |
|------------------|----|

Wide Miniature Rail Top Mount Single Row (Top Mount Rail)Details

| | |
|-----------|----|
| Size [mm] | 12 |
|-----------|----|

(Top Mount Rail)Dimensions

| | |
|---------|-----|
| H [mm] | 14 |
| W1 [mm] | 24 |
| H1 [mm] | 8.5 |
| P [mm] | 40 |
| D [mm] | 8 |
| d1 [mm] | 4.5 |
| g1 [mm] | 4.5 |

(Top Mount Rail)Weight

| | |
|--------------------|--------|
| Weights-Rail [g/m] | 1472.0 |
|--------------------|--------|

Wide Miniature Rail Bottom Tapped Mount Single Row (Bottom Mount Rail)Details

| | |
|-----------|----|
| Size [mm] | 12 |
|-----------|----|

(Bottom Mount Rail)Dimensions

| | |
|---------|----------|
| H1 [mm] | 9.5 |
| W1 [mm] | 42 |
| P [mm] | 40 |
| M1 | M5 x 0.8 |

(Bottom Mount Rail)Weight

| | |
|--------------------|--------|
| Weights-Rail [g/m] | 1472.0 |
|--------------------|--------|