


DD-256-HD/07XX

Call 800-321-7800 or visit us online at [www.nookindustries.com](http://www.nookindustries.com) to configure and order your DD-256-HD/07XX today!

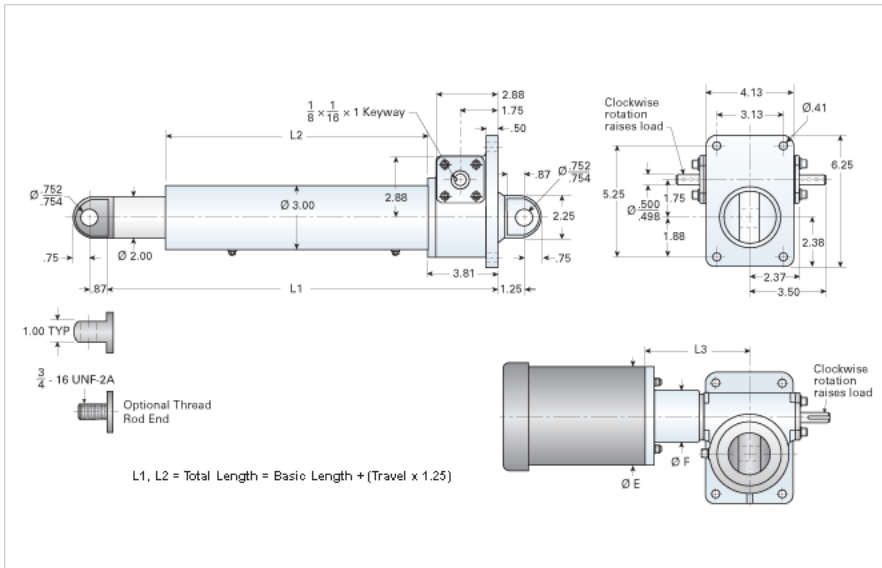

**Performance Specifications**

Travel Rate [in/min]	72
Dynamic Capacity [lb]	2000
Rated Life [in]	4099999
Motor Horse Power [hp]	0.75
Maximum Rod Reaction Torque [in-lb]	89
Std. Brake Torque [ft-lb]	6
Approximate Stopping Distance No Load [in]	0.06
Approximate Stopping Distance Full Load [in]	0.09

**Details**

Gear Ratio	6:1
Input Turns Per Inch Of Travel	24
Torque To Raise 1 lb. [in-lb]	0.0102
Max Capacity [lb]	5000
Max HP [hp]	2

**Weight**

Basic Weight [lb]	33
Per Inch of Travel [lb]	1.05

**Tube Dimensions**

L1 Basic Length [in]	12.44
L2 Basic Length [in]	7.13

**NEMA 42 Dimensions**

L3 [in]	-
E [in]	-
F [in]	-

**NEMA 48 Dimensions**

L3 [in]	-
E [in]	-
F [in]	-

**NEMA 56C Dimensions**

L3 [in]	6.25
E [in]	6.62
F [in]	3.50

**NEMA 182TC Dimensions**

L3 [in]	-
E [in]	-
F [in]	-

**NEMA 184TC Dimensions**

L3 [in]	-
E [in]	-
F [in]	-

**NEMA 213TC Dimensions**

L3 [in]	-
E [in]	-
F [in]	-