


## DD-10024-HD/15XX

Call 800-321-7800 or visit us online at [www.nookindustries.com](http://www.nookindustries.com) to configure and order your DD-10024-HD/15XX today!

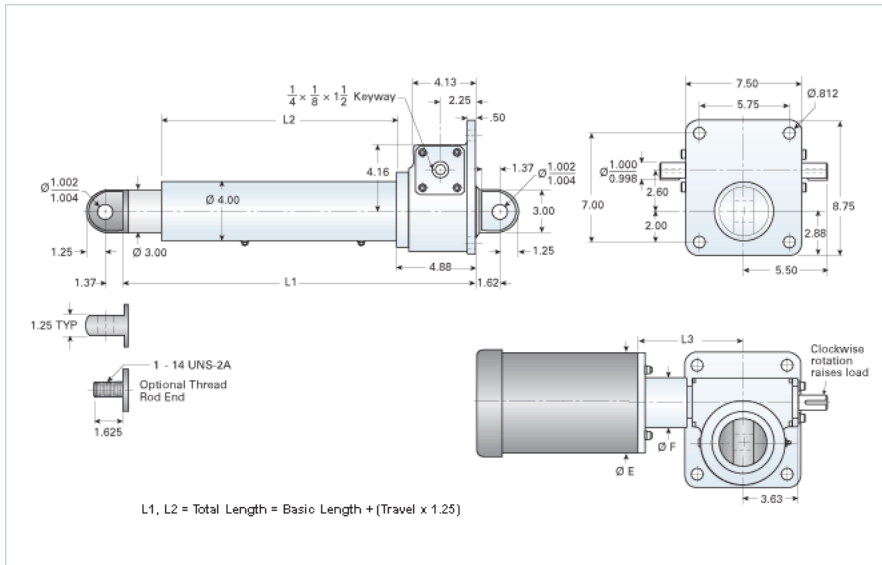

### Performance Specifications

Travel Rate [in/min]	34
Dynamic Capacity [lb]	7150
Rated Life [in]	2800000
Motor Horse Power [hp]	1.5
Maximum Rod Reaction Torque [in-lb]	598
Std. Brake Torque [ft-lb]	6
Approximate Stopping Distance No Load [in]	0.07
Approximate Stopping Distance Full Load [in]	0.09

### Details

Gear Ratio	24:1
Input Turns Per Inch Of Travel	50.66
Torque To Raise 1 lb. [in-lb]	0.0077
Max Capacity [lb]	20000
Max HP [hp]	1.5

### Weight

Basic Weight [lb]	80
Per Inch of Travel [lb]	1.92

### Tube Dimensions

L1 Basic Length [in]	15.25
L2 Basic Length [in]	8.88

### NEMA 42 Dimensions

L3 [in]	-
E [in]	-
F [in]	-

### NEMA 48 Dimensions

L3 [in]	-
E [in]	-
F [in]	-

### NEMA 56C Dimensions

L3 [in]	8.25
E [in]	6.75
F [in]	4.38

### NEMA 182TC Dimensions

L3 [in]	-
E [in]	-
F [in]	-

### NEMA 184TC Dimensions

L3 [in]	9.00
E [in]	9.25
F [in]	4.38

### NEMA 213TC Dimensions

L3 [in]	-
E [in]	-
F [in]	-