
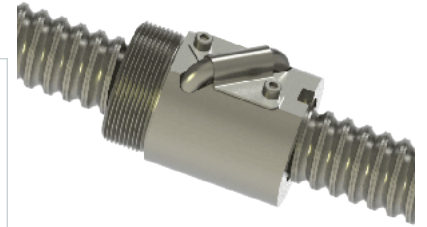


PowerTrac 1000 - 0250 SRT RA, with SBN Ball Nut, Stainless Steel,

Call 800-321-7800 or visit us online at www.nookindustries.com to configure and order your PowerTrac 1000 - 0250 SRT RA, with SBN Ball Nut,

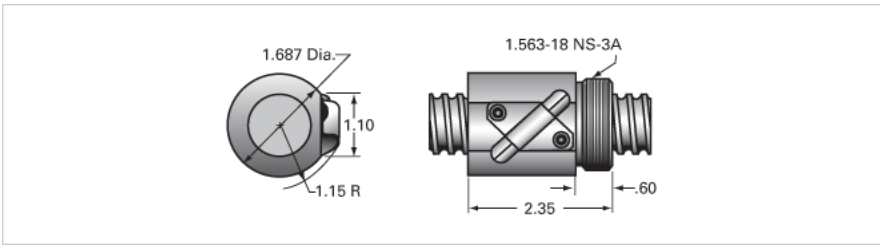

Inch Ball Screw	
Product Info	
Screw Code	1000-0250 SRT RS
Precision	SRT
Screw Material	17-4 PH Stainless
Thread Direction	RH
Details	
Ball Circle Diameter [in]	1.000
Lead [in]	0.250
Root Diameter [in]	0.820
End Code for Types 1,2,3,5 [* Journals may show tracings of the thread]	20
End Code for Type 4 [* Journals may show tracings of the thread]	12
Performance Specifications	
Lead Accuracy +/- [in./ft.]	0.0040
Part Numbers	
2 ft. Part Number	
4 ft. Part Number	SRT6668
6 ft. Part Number	
8 ft. Part Number	SRT6676
12 ft. Part Number	SRT6684
16 ft. Part Number	
20 ft. Part Number	
Weight	
Screw Weight [lb./ft.]	2.20
Inch Ball Nut, for SRT, Standard Accuracy, No Preload, SBN, Stainless Steel	
Product Info	
Ball Nut Number	SBN10470
Thread Direction	RH
Details	
Ball Circle Diameter [in]	1.000
Lead [in]	0.250
Nominal Ball Diameter [in]	0.156
Root diameter [in]	0.820
Forces and Torques	
Torque to Raise 1 lb. [in-lb]	0.044
Flange Part Numbers	
Flange Part Number	-
Wiper Part Numbers	
Wiper Kit Part Number	WKB1050
Weight	
Nut Weight [lb]	0.80
Performance Specifications	
Lead Accuracy +/- [in./ft.]	0.004
Maximum Adjustable Preload [lb]	
Spring Rate x 10 ⁶ [lb./in.]	
Dynamic Load [lb]	290
Static Load [lb]	2504