


## NH15ER Assembly

Call 800-321-7800 or visit us online at [www.nookindustries.com](http://www.nookindustries.com) to configure and order your NH15ER Assembly today!

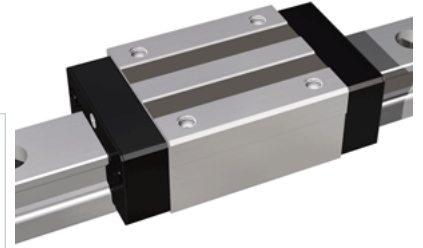

<b>Dimensions</b>	
H [mm]	28
H1 [mm]	4.5
N [mm]	9.5
<b>Metric Profile Rail</b>	
<b>Details</b>	
Size [mm]	15
Type	Standard
<b>Dimensions</b>	
d2 [mm]	7.5
d3 [mm]	4.5
h [mm]	7
H4 [mm]	17
F [mm]	60
W [mm]	15
Maximum Length [mm]	3000
<b>Weight</b>	
Weights-Rail [kg/m]	1.7
<b>Metric Runner Block, Heavy Load, Narrow Width, 4 Tapped Holes</b>	
<b>Details</b>	
Size [mm]	15
<b>Dimensions</b>	
L1 [mm]	59
L2 [mm]	38.5
L3 [mm]	26
L4 [mm]	0
M1 x l	M4X5
H3 [mm]	6
W1 [mm]	34
W2 [mm]	26
W3 [mm]	4
<b>Forces and Torques</b>	
Basic Load Ratings C [kN]	8.82
Basic Load Ratings C [lbf]	1982
Basic Load Ratings C0 [kN]	17.02
Basic Load Ratings C0 [lbf]	3826
Static Moment Ratings-Ma [kN-m]	0.12
Static Moment Ratings-Ma [lb-in]	1036
Static Moment Ratings-Mb [kN-m]	0.12
Static Moment Ratings-Mb [lb-in]	1036
Static Moment Ratings-Mc [kN-m]	0.18
Static Moment Ratings-Mc [lb-in]	1523
<b>Weight</b>	
Weight-Block [kg]	0.20
<b>Grease Fitting</b>	
Grease Fitting Part Number	NAS516-1A