
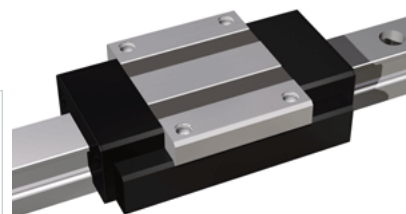


## NH30TA Assembly

Call 800-321-7800 or visit us online at [www.nookindustries.com](http://www.nookindustries.com) to configure and order your NH30TA Assembly today!

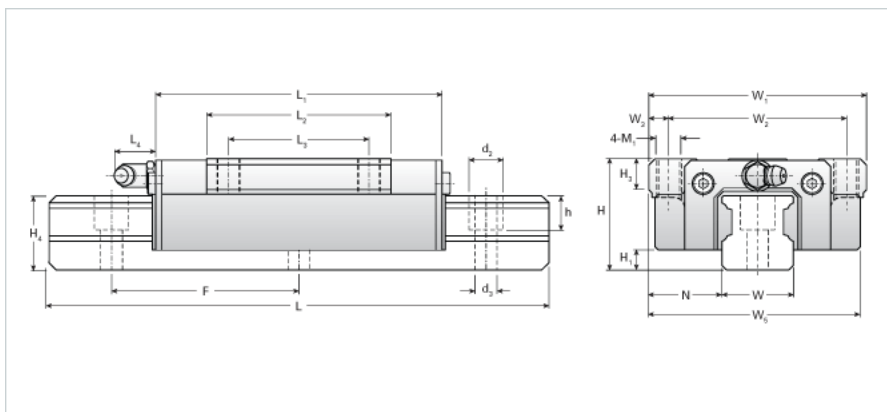

### Dimensions

H [mm]	42
H1 [mm]	7
N [mm]	31.0

### Metric Profile Rail (Rail)Details

Size [mm]	30
Type	Standard

### (Rail)Dimensions

d2 [mm]	14
d3 [mm]	9
h [mm]	14
H4 [mm]	28
F [mm]	80
W [mm]	28
Maximum Length [mm]	4000

### (Rail)Weight

Weights-Rail [kg/m]	5.3
---------------------	-----

### Metric Runner Block, Heavy Load, High Speed, 4 Tapped Holes On Flange (Runner Block)Details

Size [mm]	30
-----------	----

### (Runner Block)Dimensions

L1 [mm]	111
L2 [mm]	68
L3 [mm]	52
L4 [mm]	12
M1 x l	M10X14
H3 [mm]	13
W1 [mm]	90
W2 [mm]	72
W3 [mm]	9
W5 [mm]	81

### (Runner Block)Forces and Torques

Basic Load Ratings C [kN]	28.24
Basic Load Ratings C [lbf]	6347
Basic Load Ratings C0 [kN]	46.86
Basic Load Ratings C0 [lbf]	10535
Static Moment Ratings-Ma [kN-m]	0.43
Static Moment Ratings-Ma [lb-in]	3819
Static Moment Ratings-Mb [kN-m]	0.43
Static Moment Ratings-Mb [lb-in]	3819
Static Moment Ratings-Mc [kN-m]	0.72
Static Moment Ratings-Mc [lb-in]	6336

### (Runner Block)Weight

Weight-Block [kg]	1.0
-------------------	-----

### (Runner Block)Grease Fitting

Grease Fitting Part Number	B-M6F
----------------------------	-------