

Product Specification Sheet

NH55TA Assembly

2D/3D CAD

ONLINE

Call 800-321-7800 or visit us online at www.nookindustries.com to configure and order your NH55TA Assembly today!


1

F

T

L

_____ d_, |__

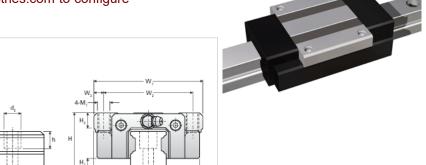

w w

Dimensions	
H [mm]	70
H1 [mm]	14
N [mm]	43.5
Metric Profile Rail	40.0
(Rail)Details	
Size [mm]	55
Туре	Standard
(Rail)Dimensions	otandard
d2 [mm]	23
d3 [mm]	16
h [mm]	24
H4 [mm]	48
F [mm]	120
W [mm]	53
Maximum Length [mm]	3000
(Rail)Weight	5000
Weights-Rail [kg/m]	16.5
Metric Runner Block, Heavy Load, High Speed, 4 Tapped Holes On Flange	10.0
(Runner Block)Details	
Size [mm]	55
(Runner Block)Dimensions	55
L1 [mm]	189
L2 [mm]	124
L3 [mm]	95
L4 [mm]	16
M1xl	M14X23
H3 [mm]	17
W1 [mm]	140
W2 [mm]	116
W3 [mm]	12
W5 [mm]	130
(Runner Block)Forces and Torques	100
Basic Load Ratings C [kN]	90.02
Basic Load Ratings C [lbf]	20232
Basic Load Ratings C0 [kN]	137.09
Basic Load Ratings C0 [lbf]	30811
Static Moment Ratings-Ma [kN-m]	2.22
Static Moment Ratings-Ma [lb-in]	19617
Static Moment Ratings-Mb [kN-m]	2.22
Static Moment Ratings-Mb [lb-in]	19617
Static Moment Ratings-Mc [kN-m]	4.25
Static Moment Ratings-Mc [lb-in]	37671
(Runner Block)Weight	
Weight-Block [kg]	4.4
(Runner Block)Grease Fitting	
Grease Fitting Part Number	B-PT 1/8
	2