
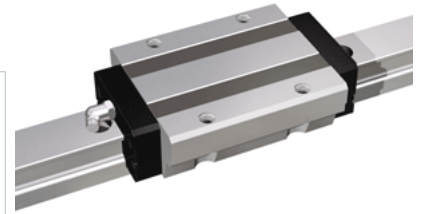


NH55LEA Assembly

Call 800-321-7800 or visit us online at www.nookindustries.com to configure and order your NH55LEA Assembly today!

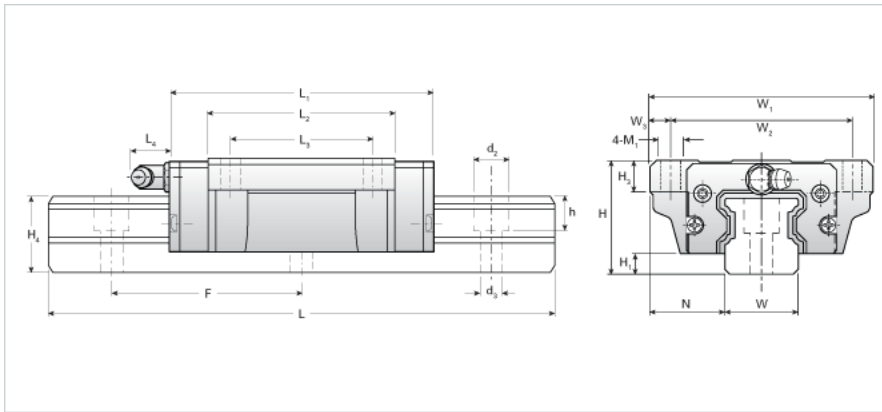

| | |
|---|----------|
| Dimensions | |
| H [mm] | 70 |
| H1 [mm] | 14 |
| N [mm] | 43.5 |
| Metric Profile Rail | |
| Details | |
| Size [mm] | 55 |
| Type | Standard |
| Dimensions | |
| d2 [mm] | 23 |
| d3 [mm] | 16 |
| h [mm] | 24 |
| H4 [mm] | 48 |
| F [mm] | 120 |
| W [mm] | 53 |
| Maximum Length [mm] | 3000 |
| Weight | |
| Weights-Rail [kg/m] | 16.5 |
| Metric Runner Block, Ultra Heavy Load, Flange Type, 4 Tapped Holes | |
| Details | |
| Size [mm] | 55 |
| Dimensions | |
| L1 [mm] | 191 |
| L2 [mm] | 156 |
| L3 [mm] | 95 |
| L4 [mm] | 16 |
| M1 | M14 |
| H3 [mm] | 17 |
| W1 [mm] | 140 |
| W2 [mm] | 116 |
| W3 [mm] | 12 |
| Forces and Torques | |
| Basic Load Ratings C [kN] | 119.05 |
| Basic Load Ratings C [lbf] | 26756 |
| Basic Load Ratings C0 [kN] | 183.09 |
| Basic Load Ratings C0 [lbf] | 41147 |
| Static Moment Ratings-Ma [kN-m] | 3.71 |
| Static Moment Ratings-Ma [lb-in] | 32810 |
| Static Moment Ratings-Mb [kN-m] | 3.71 |
| Static Moment Ratings-Mb [lb-in] | 32810 |
| Static Moment Ratings-Mc [kN-m] | 5.31 |
| Static Moment Ratings-Mc [lb-in] | 47046 |
| Weight | |
| Weight-Block [kg] | 6.50 |
| Grease Fitting | |
| Grease Fitting Part Number | B-PT 1/8 |