
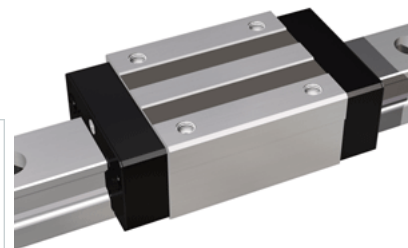


NH65ER Assembly

Call 800-321-7800 or visit us online at www.nookindustries.com to configure and order your NH65ER Assembly today!

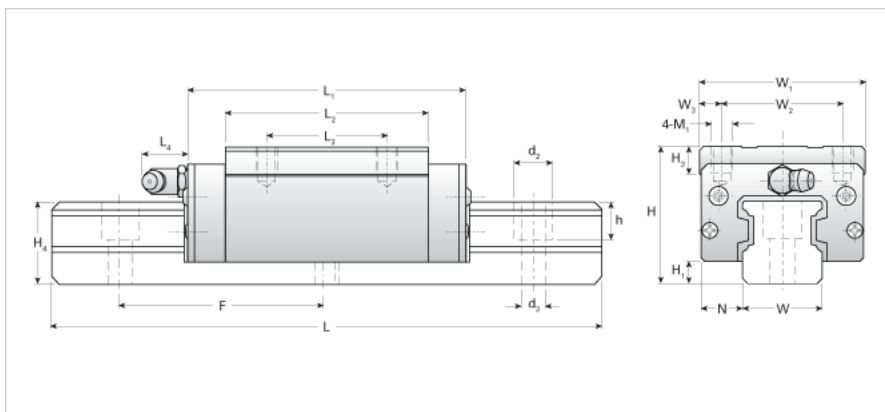

| | |
|--|----------|
| Dimensions | |
| H [mm] | 90 |
| H1 [mm] | 14 |
| N [mm] | 31.5 |
| Metric Profile Rail | |
| Details | |
| Size [mm] | 65 |
| Type | Standard |
| Dimensions | |
| d2 [mm] | 26 |
| d3 [mm] | 18 |
| h [mm] | 25 |
| H4 [mm] | 58 |
| F [mm] | 150 |
| W [mm] | 63 |
| Maximum Length [mm] | 3000 |
| Weight | |
| Weights-Rail [kg/m] | 24.9 |
| Metric Runner Block, Heavy Load, Narrow Width, 4 Tapped Holes | |
| Details | |
| Size [mm] | 65 |
| Dimensions | |
| L1 [mm] | 198 |
| L2 [mm] | 148 |
| L3 [mm] | 70 |
| L4 [mm] | 16 |
| M1 x l | M16x20 |
| H3 [mm] | 23 |
| W1 [mm] | 126 |
| W2 [mm] | 90 |
| W3 [mm] | 18 |
| Forces and Torques | |
| Basic Load Ratings C [kN] | 141.11 |
| Basic Load Ratings C [lbf] | 31714 |
| Basic Load Ratings C0 [kN] | 215.16 |
| Basic Load Ratings C0 [lbf] | 48354 |
| Static Moment Ratings-Ma [kN-m] | 4.21 |
| Static Moment Ratings-Ma [lb-in] | 37237 |
| Static Moment Ratings-Mb [kN-m] | 4.21 |
| Static Moment Ratings-Mb [lb-in] | 37237 |
| Static Moment Ratings-Mc [kN-m] | 7.38 |
| Static Moment Ratings-Mc [lb-in] | 65360 |
| Weight | |
| Weight-Block [kg] | 7.20 |
| Grease Fitting | |
| Grease Fitting Part Number | B-PT 1/8 |