
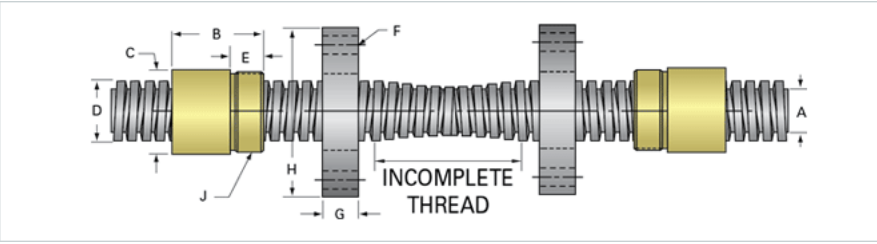


## PowerAC 1 1/4"-5 TA w/Bronze Nut

Call 800-321-7800 or visit us online at [www.nookindustries.com](http://www.nookindustries.com) to configure and order your PowerAC 1 1/4"-5 TA w/Bronze Nut today!

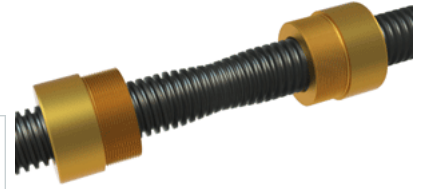

### Rolled Inch Twin-Lead Acme Screw

#### Product Info

Screw Code	125 TA
Screw Direction	RH/LH
Screw Material	4140 Series

#### Details

Lead [in]	0.200
Starts	1
Pitch [in]	0.200
Turns Per Inch	5
Threads per Inch	5
Thread Code	125
Form	2C
End Code for Types 1,2,3,5 [* Journals may show tracings of the thread]	25
End Code for Type 4 [* Journals may show tracings of the thread]	16

#### Dimensions

A - Root Diameter Minimum [in]	0.999
D - Nominal Rod Diameter [in]	1.250
Incomplete Overlapping Thread Length [in]	2.50
Maximum Overall Length [in]	144
Maximum Useable LH & RH Thread [in]	70.75

#### Weight

Weight Per Foot [lb]	3.49
----------------------	------

#### Part Numbers

36" Part Number	
72" Part Number	
144" Part Number	TL1-1/4-5RS 144

#### Performance Specifications

Lead Accuracy +/- [in/in]	0.0003
---------------------------	--------

### Inch Acme Nut with Optional Flange

#### Product Info

Part Number	80125
Thread Direction	LH
Type	Bronze

#### Details

Lead [in]	0.200
Starts	1
Pitch [in]	0.200
Turns Per Inch	5
Lash (Maximum Axial) [in]	0.010
Nominal Rod Diameter [in]	1.250
Threads per Inch	5
Thread Code	125
Form	2C

#### Dimensions

B [in]	1.75
C [in]	2.13
E [in]	0.81
F (n) Dia. [in]	(4) .397
F BCD [in]	3.440
G [in]	0.83
H [in]	4.20
J [in]	1.967-18

#### Forces and Torques

Torque to Raise 1 lb. [in-lb]	0.114
-------------------------------	-------

#### Flange Part Numbers

Flange No-Lash Part Number	73420
Flange Part Number	FLG7572

#### Weight

Flange Weight [lb]	3.19
--------------------	------

Nut Weight [lb]	1.29
<b>Performance Specifications</b>	
Efficiency [%]	28
Lead Accuracy +/- [in/in]	0.0003
Dynamic Load Capacity [lb]	7812
Static Load Capacity [lb]	25000
<b>Inch Acme Nut with Optional Flange</b>	
<b>Product Info</b>	
Part Number	20125
Thread Direction	RH
Type	Bronze
<b>Details</b>	
Lead [in]	0.200
Starts	1
Pitch [in]	0.200
Turns Per Inch	5
Lash (Maximum Axial) [in]	0.010
Nominal Rod Diameter [in]	1.250
Threads per Inch	5
Thread Code	125
Form	2C
<b>Dimensions</b>	
B [in]	1.75
C [in]	2.13
E [in]	0.81
F (n) Dia. [in]	(4) .397
F BCD [in]	3.440
G [in]	0.83
H [in]	4.20
J [in]	1.967-18
<b>Forces and Torques</b>	
Torque to Raise 1 lb. [in-lb]	0.114
<b>Flange Part Numbers</b>	
Flange No-Lash Part Number	73420
Flange Part Number	FLG7572
<b>Weight</b>	
Flange Weight [lb]	3.19
Nut Weight [lb]	1.29
<b>Performance Specifications</b>	
Efficiency [%]	28
Lead Accuracy +/- [in/in]	0.0003
Dynamic Load Capacity [lb]	7812
Static Load Capacity [lb]	25000