


DD-20024-HD

Call 800-321-7800 or visit us online at www.nookindustries.com to configure and order your DD-20024-HD today!

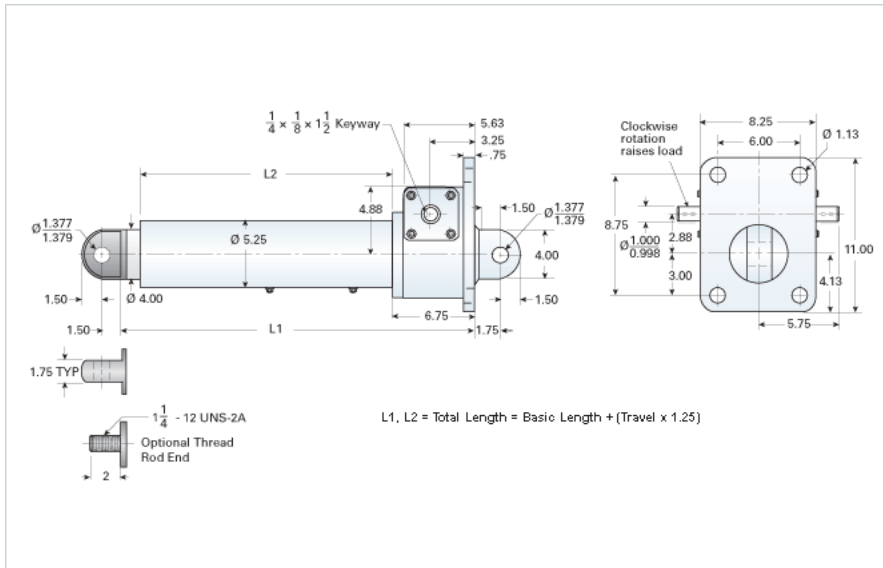

Details

| | |
|--------------------------------|------------------|
| Gear Ratio | 24:1 |
| Max Capacity [lb] | 40000 |
| Input Turns Per Inch Of Travel | 48 |
| Torque To Raise 1 lb. [in-lb] | 0.0079 |
| Ball Screw | 2250-0500 SRT RA |
| Screw Lead [in] | 0.500 |
| Root Diameter [in] | 1.850 |
| Max HP [hp] | 7.5 |

Weight

| | |
|-------------------------|------|
| Basic Weight [lb] | 154 |
| Per Inch of Travel [lb] | 3.31 |

Tube Dimensions

| | |
|----------------------|-------|
| L1 Basic Length [in] | 21.13 |
| L2 Basic Length [in] | 12.63 |

NEMA 42 Dimensions

| | |
|---------|---|
| L3 [in] | - |
| E [in] | - |
| F [in] | - |

NEMA 48 Dimensions

| | |
|---------|---|
| L3 [in] | - |
| E [in] | - |
| F [in] | - |

NEMA 56C Dimensions

| | |
|---------|------|
| L3 [in] | 8.65 |
| E [in] | 6.75 |
| F [in] | 5.19 |

NEMA 182TC Dimensions

| | |
|---------|---|
| L3 [in] | - |
| E [in] | - |

NEMA 182TC/18TCc Dimensions

| | |
|--------|---|
| F [in] | - |
|--------|---|

NEMA 184TC Dimensions

| | |
|---------|------|
| L3 [in] | 9.00 |
| E [in] | 9.25 |
| F [in] | 5.19 |

NEMA 213TC Dimensions

| | |
|---------|------|
| L3 [in] | 9.65 |
| E [in] | 9.25 |
| F [in] | 5.69 |